


CATALOGUE

2022-23



“A little bit of
Light Dispersa
lot of **Darkness**,”

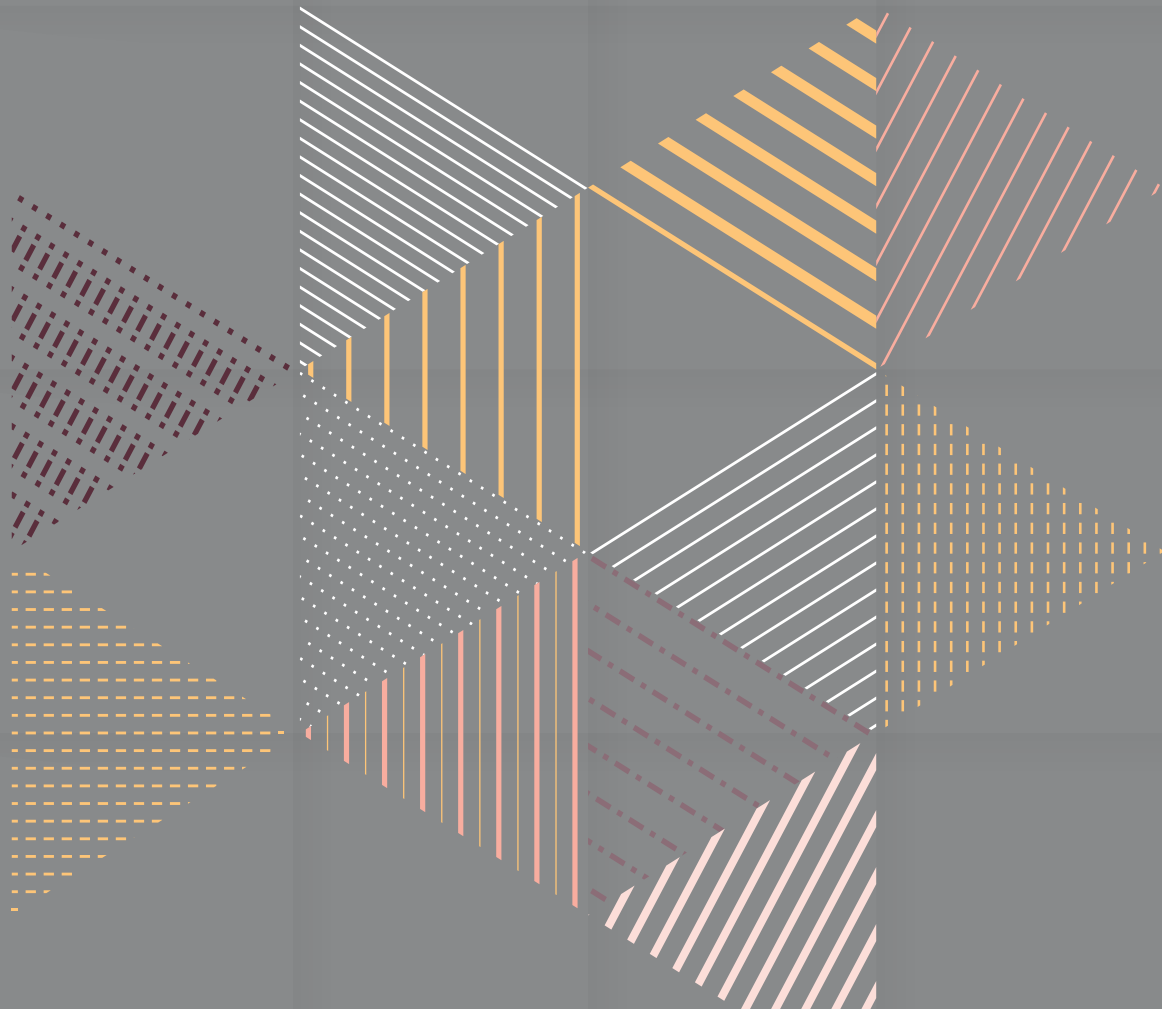

“Everything is
really about
Lighting,”



PROFILE

Range-Lite is one of the Leading LED Lighting Solutions provider, with one of the best talent pools of LED Lighting Industry experts and having a vast experience of around 20 plus years. Our Factory is Located in Mumbai - Vasai, where we have our own Manufacturing Unit, Quality Facility, R&D Centre & Warehousing etc. We develop lighting solutions that enhance people's life, and therefore people's quality of life. We explore digital innovations in order to be able to provide smart connected lighting solutions.

Mission

Our mission is to be the best luminary company, first at a National level and later go on to achieve this at an International level as well. We wish to keep our products as cost effective as possible, so that there comes a time when no Indian lives in a house without lights.

Vision

We see ourselves, growing at heights that every Indian aspires to achieve. To deliver the best at affordable prices. To work out and reach maximum people possible, so that every Indian's home is lightened with RANGE-LITE lights.

Quality

A Promise of Complete Satisfaction of our Customers across Goods & Services.



**BE CREDIBLE
BE RELEVANT
BE UNIQUE**

INDEX

LED SPOT LIGHT

Pg 02-20



RL 018-3W
Pg. 03



RL 019-3W
Pg. 03



RL 80111-3W
Pg. 03



RL 419-3W
Pg. 04



RL 90189-3W
Pg. 04



RL 775
Pg. 06



RL 007
Pg. 06



RL 439
Pg. 06



RL 103
Pg. 07



RL 340
Pg. 07



RL 315
Pg. 07



RL 417
Pg. 08



RL 418
Pg. 08



RL 419
Pg. 08



RL 90189
Pg. 10



RL 2011
Pg. 10



RL 80111/12/13
Pg. 10



RL 3113/3114
Pg. 11



RL 182
Pg. 11



RL 8053
Pg. 11



RL 80214
Pg. 12



RL 9070
Pg. 12



RL 9071
Pg. 12



RL 9350
Pg. 13



RL 9350
Pg. 13



RL 1071
Pg. 14



RL 5033
Pg. 14



RL 5033-16
Pg. 14



RL 22311
Pg. 15



RL 9356
Pg. 15



RL 438
Pg. 15



RL 90512B
Pg. 16



RL 90624B
Pg. 16



RL 92225
Pg. 16



RL 92350
Pg. 16



RL 10021R
Pg. 18



RL 10021S
Pg. 18



RL 10021S
Pg. 18



RL 1350
Pg. 19



RL 292
Pg. 19



RL 0312T
Pg. 19



RL 309
Pg. 20



RL 309
Pg. 20



RL 308 GU10
Pg. 20

LASER BLADE

Pg 21-25



RL 1408
Pg. 22



RL 1406
Pg. 22



RL 1409
Pg. 22



RL 1407
Pg. 22



RL 4125
Pg. 23



RL 4125
Pg. 23



RL 4125
Pg. 23



RL 4125
Pg. 23



RL 4125
Pg. 24




RL 1103
Pg. 24



RL 1105
Pg. 24



RL 1106
Pg. 24



RL 1107
Pg. 25



RL 5008
Pg. 25



RL 5008
Pg. 25

I N D E X

LED PANEL & DOWN LIGHT

Pg 26-29



RL 6308/15/22R
Pg. 27



RL 6308/15/22S
Pg. 27



RL 15430/40/50/60R
Pg. 27



RL 15430/40/50/60S
Pg. 28



RL 888R
Pg. 28



RL 888S
Pg. 28



RL 270RD
Pg. 29



RL 270SQ
Pg. 29



RL 37045/48/53
Pg. 29

WALL WASHER

Pg 30-31



RL 1496
Pg. 31



RL 1089
Pg. 31



RL 1201
Pg. 31

SURFACE WALL WASHER

Pg 32-33



RL 107B
Pg. 33



RL 140
Pg. 33



RL 70110
Pg. 33

SURFACE LIGHT COB

Pg 34-38



RL 2023R
Pg. 35



RL 2024
Pg. 35



RL 2707/12/15
Pg. 35



RL 6021
Pg. 36



RL 3003
Pg. 36



RL 3003
Pg. 36



RL 161
Pg. 37



RL 70183
Pg. 37




RL 526
Pg. 37



RL 2025
Pg. 38



RL 4022
Pg. 38



RL 4022
Pg. 38

I N D E X

HANGING LIGHT

Pg 39



RL 23226
Pg. 39



RL 43255
Pg. 39

SURFACE LIGHT SMD

Pg 40-41



RL 11011
Pg. 40



RL 199
Pg. 40



RL 812
Pg. 41



RL 16030/40/60S
Pg. 41



RL 16030/40/60S
Pg. 41

TRACK LIGHT

Pg 42-43



RL 4003
Pg. 42



RL 4004
Pg. 42



RL 6045/46
Pg. 43



RL 6038/47
Pg. 43




1MTR/2MTR TRACK (2 Line)
Pg. 43

48V - MAGNETIC TRACK LIGHT

Pg 44-57



RL 4020B
Pg. 46



RL 4028
Pg. 46



RL 4055
Pg. 46



RL 4057
Pg. 46



RL 4021
Pg. 47



RL 4022
Pg. 47



RL 4023
Pg. 47



RL 4023
Pg. 48



RL 4023D
Pg. 48



RL 4023D
Pg. 48



RL 4024
Pg. 49



RL 4025
Pg. 49



RL 4025
Pg. 49



RL 4026
Pg. 50



RL 4056
Pg. 51



RL 4057
Pg. 51



RL 4029
Pg. 51




RL 4029
Pg. 51



RL 4029
Pg. 51



RL 4029
Pg. 54



RL 4029
Pg. 54



RL 4029
Pg. 54



RL 4029
Pg. 54



RL 4036
Pg. 55



RL 4037
Pg. 55



RL 4037
Pg. 55



RL 4038
Pg. 56



RL 4039
Pg. 56



RL 4042
Pg. 56



RL 4043
Pg. 57



RL 4044
Pg. 57



RL 4044
Pg. 57

INDEX

LED STRIP LIGHT & DRIVER

Pg 58-60



LED STRIP LIGHT
Pg. 58



12V & 24V PS
Pg. 59



DIMMABLE
Pg. 59



DALI DIMMABLE
Pg. 59



DALI CCT
Pg. 59



48V SMPS & FC
Pg. 60



48V-15MM
Pg. 60



48V-20MM & 35MM
Pg. 60

LED WALL & BOLLARD LIGHT

Pg 62-85



RL 1821
Pg. 63



RL 1822
Pg. 63



RL 1822
Pg. 63



RL 1891
Pg. 64



RL 1892
Pg. 64



RL 1892
Pg. 64



RL 9395
Pg. 65



RL 9396
Pg. 65



RL 9397
Pg. 65



RL 2322
Pg. 66



RL 2323
Pg. 66



RL 2323
Pg. 66



RL 2052
Pg. 67



RL 2054
Pg. 67



RL 2055
Pg. 67



RL 2371
Pg. 68



RL 2372
Pg. 68



RL 2801
Pg. 69



RL 2801
Pg. 69



RL 2801
Pg. 69



RL 2803
Pg. 70



RL 2803
Pg. 70



RL 2803
Pg. 70



RL 2802
Pg. 71



RL 8347
Pg. 71



RL 1982
Pg. 72



RL 1982
Pg. 72



RL 0225
Pg. 73



RL 0260
Pg. 73



RL 5567
Pg. 74



RL 5567
Pg. 74



RL 5567
Pg. 74



RL 2511
Pg. 75



RL 2512
Pg. 75



RL 2512
Pg. 75



RL 2804
Pg. 76



RL 2804
Pg. 76



RL 2804
Pg. 76



RL 2492
Pg. 77



RL 2492
Pg. 77



RL 2131
Pg. 78



RL 2131
Pg. 78



RL 1722A
Pg. 79



RL 1722A
Pg. 79



RL 2091
Pg. 80



RL 2091
Pg. 80



RL 1793
Pg. 81



RL 1793-3000
Pg. 81



RL 3665
Pg. 83



RL 2665
Pg. 83



RL 1903
Pg. 84



RL 1904
Pg. 84



RL 2280
Pg. 85




RL 2279
Pg. 85

INDEX

LED GATE LIGHT

Pg 86-87



RL 2552
Pg. 86



RL 2667/68
Pg. 86



RL 2666
Pg. 87



RL 3622
Pg. 87



RL 2622
Pg. 87

LED WALL LIGHT

Pg 88-104



RL 2061
Pg. 89



RL 1901
Pg. 89



RL 2101
Pg. 89



RL 2551
Pg. 90



RL 2601
Pg. 90



RL 2341
Pg. 90



RL 2271
Pg. 91



RL 2381
Pg. 91



RL 1991
Pg. 91



RL 1861
Pg. 92



RL 2571
Pg. 92



RL 6507
Pg. 92



RL 930
Pg. 93



RL 1741
Pg. 93



RL 3705R
Pg. 93



RL 3001
Pg. 94



RL 3001
Pg. 94



RL 3002
Pg. 94



RL 3002
Pg. 95



RL 1282
Pg. 95



RL 1283
Pg. 95



RL 1284
Pg. 96



RL 1285
Pg. 96



RL 2503
Pg. 96



RL 2506
Pg. 97



RL 303
Pg. 97



RL 304
Pg. 97



RL 279
Pg. 98



RL 1281B
Pg. 98



RL 2512
Pg. 98



RL 802
Pg. 99



RL 2012 RD
Pg. 99



RL 2012 SQ
Pg. 99



RL 4406
Pg. 100



RL 4412
Pg. 100



RL 2912
Pg. 100



RL 2906
Pg. 101




RL 6506
Pg. 101



RL 3303
Pg. 101



RL 10
Pg. 102



RL 12
Pg. 102



RL 14
Pg. 102



RL 2104
Pg. 103



RL 2102
Pg. 103



RL 3706
Pg. 104



RL 3707
Pg. 104



RL 3708
Pg. 104

I N D E X

RECESSED FOOT LIGHT

Pg 105-110



RL 224
Pg. 106



RL 225
Pg. 106



RL 226
Pg. 106




RL 227
Pg. 107



RL 220
Pg. 107



RL 223
Pg. 107



RL 18070
Pg. 108



RL 18077
Pg. 108



RL 0909
Pg. 108



RL 0909
Pg. 109



RL 0909
Pg. 109



RL 034
Pg. 109



RL 035
Pg. 110



RL 0503
Pg. 110

LED CEILING LIGHT

Pg 111-115



RL 2272
Pg. 112



RL 2808/14R
Pg. 112



RL 6508
Pg. 112



RL 2508
Pg. 113



RL 2514R
Pg. 113



RL 2521R
Pg. 113




RL 2522
Pg. 114




RL 2514S
Pg. 114



RL 1571
Pg. 114



RL 1320S
Pg. 115



RL 6509
Pg. 115

LED SPIKE & WALL LIGHT

Pg 116-120



RL 1407
Pg. 117



RL 1406
Pg. 117



RL 1203/07/12
Pg. 117



RL 1307
Pg. 118



RL 1951
Pg. 118



RL 1852
Pg. 118



RL 0206
Pg. 119



RL 1208/1213
Pg. 119



RL 1217
Pg. 119



RL 3003-J
Pg. 120

INDEX

INGROUND & PATH WASHER LIGHT

121-126




RL 0203
Pg. 122



RL 0204
Pg. 122



RL 0303
Pg. 122



RL 0205
Pg. 123



RL 7205
Pg. 123



RL 7206
Pg. 123



RL 7207
Pg. 124



RL 7208
Pg. 124



RL 7209
Pg. 124



RL 7210
Pg. 125



RL 7211
Pg. 125



RL 0306
Pg. 126



RL 0312
Pg. 126

UNDER WATER LIGHT

Pg 127-130



RL 0315
Pg. 128



RL 0318
Pg. 128



RL 0321
Pg. 128



RL 0324
Pg. 128



RL 0327
Pg. 129



RL 0330
Pg. 129



RL 0333
Pg. 129



RL 0336
Pg. 129



RL 0339
Pg. 130



RL 0342
Pg. 130



RL 0345
Pg. 130



RL 0348
Pg. 130

WALL WASHER

Pg 131-132



RL 7212
Pg. 131



RL 7213/14/15
Pg. 131



RL 7216
Pg. 132



RL 7216
Pg. 132



RL 7216
Pg. 132



RL 7233
Pg. 132

FLOOD LIGHT

Pg 133-135



RL 222-30W
Pg. 134



RL 222-50W
Pg. 134



RL 222-100W
Pg. 134



RL 222-150W
Pg. 134



RL 222-200W
Pg. 135



RL 222-300W
Pg. 135



RL 222-400W
Pg. 135

I N D E X

HIGHBAY LIGHT

Pg 136



RL 5505
Pg. 136



RL 4405
Pg. 136

STREET LIGHT

Pg 137



RL 999-24W
Pg. 137



RL 999-36W
Pg. 137



RL 999-50W
Pg. 137



RL 999-72W
Pg. 137



RL 999-100W
Pg. 137





RL 999-150W
Pg. 137

SOLAR STREET LIGHT

Pg 137



RL 999-50W
Pg. 137

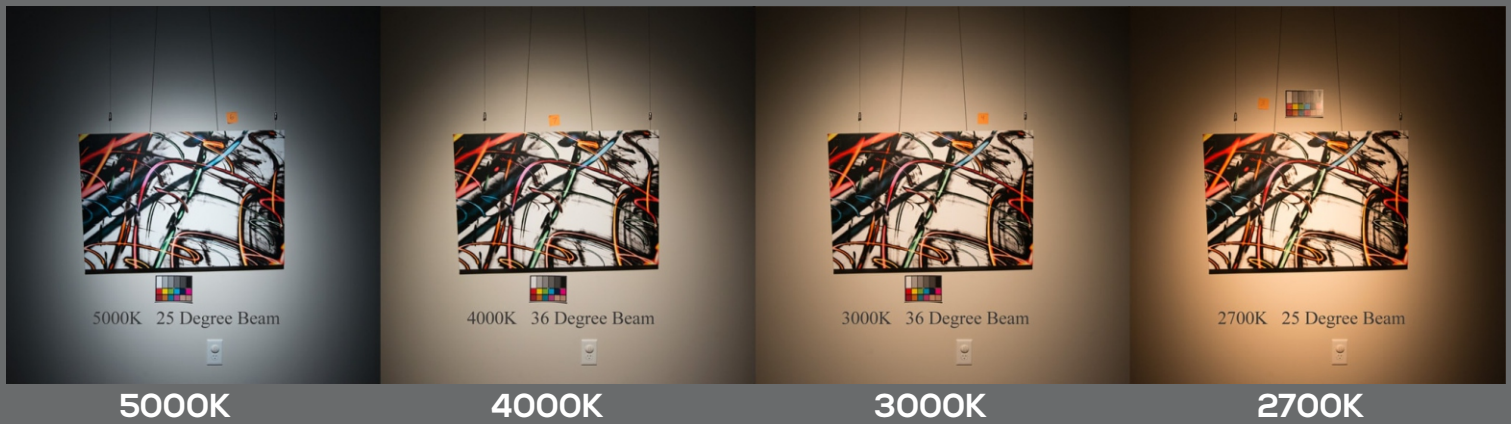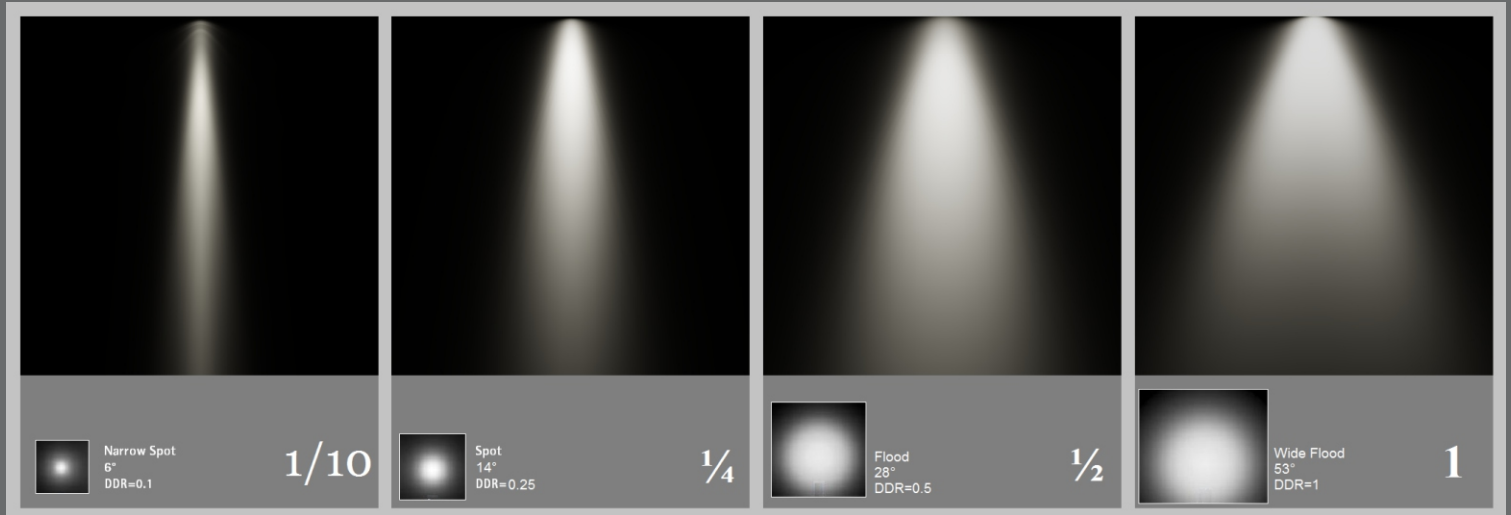


INDOOR LIGHTS






LED SPOT LIGHT



RL 018

HOUSING: Aluminium Die Casting
REFLECTOR: Lens
BEAM ANGLE: 3°
BODY COLOR: White
MOUNTING: Recessed


POWER: 3W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 70-75lm/w
IP RATING: IP20
POWER FACTOR: >0.50
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 019

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: White
MOUNTING: Recessed


POWER: 3W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 70-75lm/w
IP RATING: IP20
POWER FACTOR: >0.50
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 80111

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh+Wh, Bk+Bk
MOUNTING: Recessed

POWER: 3W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 95-100lm/w
IP RATING: IP20
POWER FACTOR: >0.50
INPUT VOLTAGE: AC 85-265V / 50~60 Hz
DRIVER: Range-lite



RL 419

HOUSING: Aluminium Die Casting

REFLECTOR: Lens

BEAM ANGLE: 24°

BODY COLOR: White, Black

MOUNTING: Recessed

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K


LUMENS OUTPUT: 95-100lm/w

IP RATING: IP20

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



RL 90189

HOUSING: Aluminium Die Casting

REFLECTOR: Lens

BEAM ANGLE: 24°

BODY COLOR: White

MOUNTING: Recessed

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K

LUMENS OUTPUT: 85-90lm/w

IP RATING: IP20

POWER FACTOR: >0.50


INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



Stay true in the
DARK & Humble in the
SPOTLIGHT




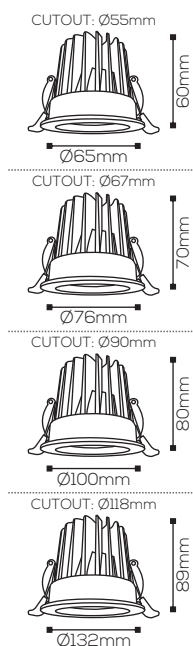

RL 775

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 24° | 38° | 38° | 38°
BODY COLOR: White
MOUNTING: Recessed


POWER: 8W | 15W | 20W | 35W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 90-100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

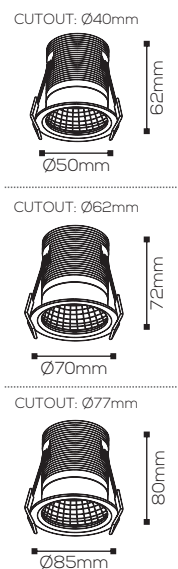

RL 007

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24° | 38° | 38°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 8W | 16W | 24W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

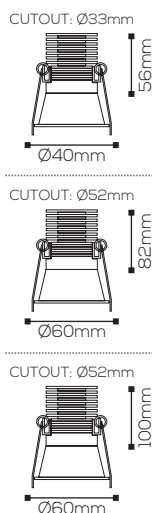

RL 439

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: White
MOUNTING: Recessed


POWER: 6W | 9W | 12W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 85-100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

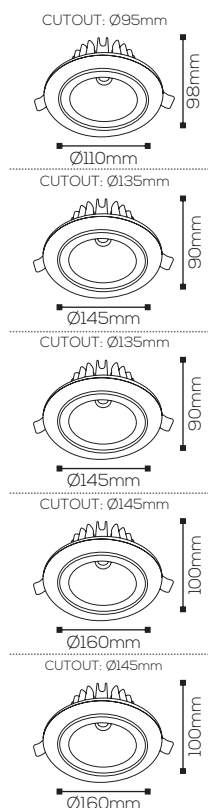

RL 103

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: White
MOUNTING: Recessed


POWER: 15W | 25W | 30W | 40W | 50W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

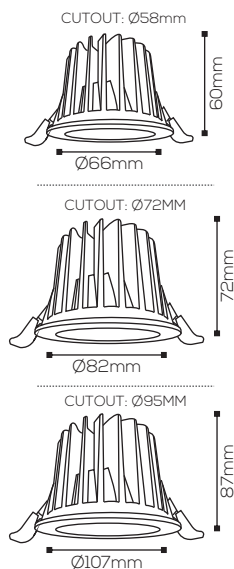

RL 340

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 24° | 38° | 38°
BODY COLOR: Wh+Bk, Bk+Bk
MOUNTING: Recessed


POWER: 8W | 15W | 25W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 95-100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

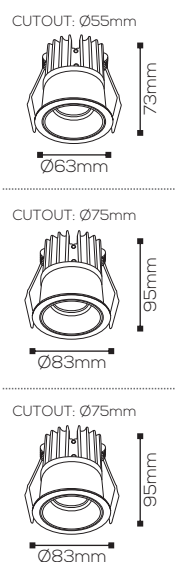

RL 315

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24° | 38° | 38°
BODY COLOR: Wh+Bm, Bk+Bm
MOUNTING: Recessed


POWER: 8W | 15W | 20W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

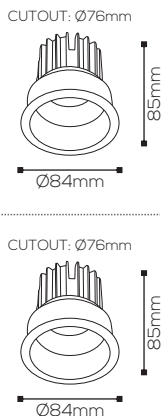

RL 417

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: White
MOUNTING: Recessed


POWER: 12W | 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

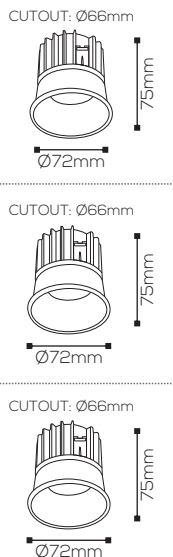

RL 418

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24° | 38° | 38°
BODY COLOR: White
MOUNTING: Recessed

POWER: 9W | 12W | 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

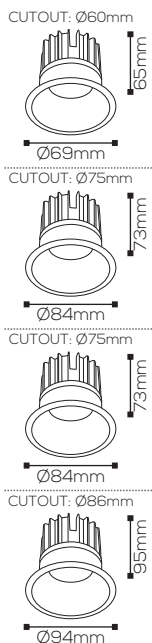

RL 419


HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24° | 38° | 38°
BODY COLOR: White
MOUNTING: Recessed

POWER: 9W | 12W | 15W | 20W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 105-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram







CUTOUT: Ø65mm



CUTOUT: Ø90mm



CUTOUT: Ø110mm



RL 90189

HOUSING: Aluminium Die Casting

REFLECTOR: Lens

BEAM ANGLE: 24° | 40° | 60°

BODY COLOR: White

MOUNTING: Recessed

POWER: 7W | 12W | 18W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K / CCT

LUMENS OUTPUT: 85-100lm/w

IP RATING: IP20


POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Osram



CUTOUT: Ø60mm



RL 2011

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 38°

BODY COLOR: Wh+Bk, Wh, Gd, Sil, Chr

MOUNTING: Recessed

POWER: 12W

LIGHT SOURCE: Cree

COLOR TEMP: 3K/4K/5K/6K

LUMENS OUTPUT: 90-95lm/w

IP RATING: IP20


POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz


DRIVER: Osram




CUTOUT: Ø60mm



CUTOUT: Ø75mm



CUTOUT: Ø85mm



RL 80111/80112/80113

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 38°

BODY COLOR: Wh+Wh, Bk+Bk, Bk+Cop,
Wh+Cop

MOUNTING: Recessed

POWER: 9W | 15W | 20W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K/5K/6K / CCT



LUMENS OUTPUT: 100-110lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz



DRIVER: Osram



RL 3113 / RL 3114

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh+Wh, Bk+Bk
MOUNTING: Recessed


POWER: 9W | 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 182

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: White
MOUNTING: Recessed


POWER: 9W | 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 8053

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: White
MOUNTING: Recessed


POWER: 5W | 8W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

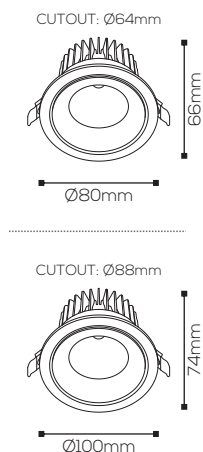

RL 80214

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24° | 40°
BODY COLOR: White
MOUNTING: Recessed


POWER: 7W | 12W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 85-90lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 9070

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 9071

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: White
MOUNTING: Recessed



POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 9350

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



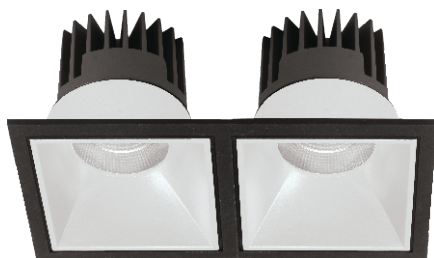


RL 9350

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Recessed

POWER: 2X15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

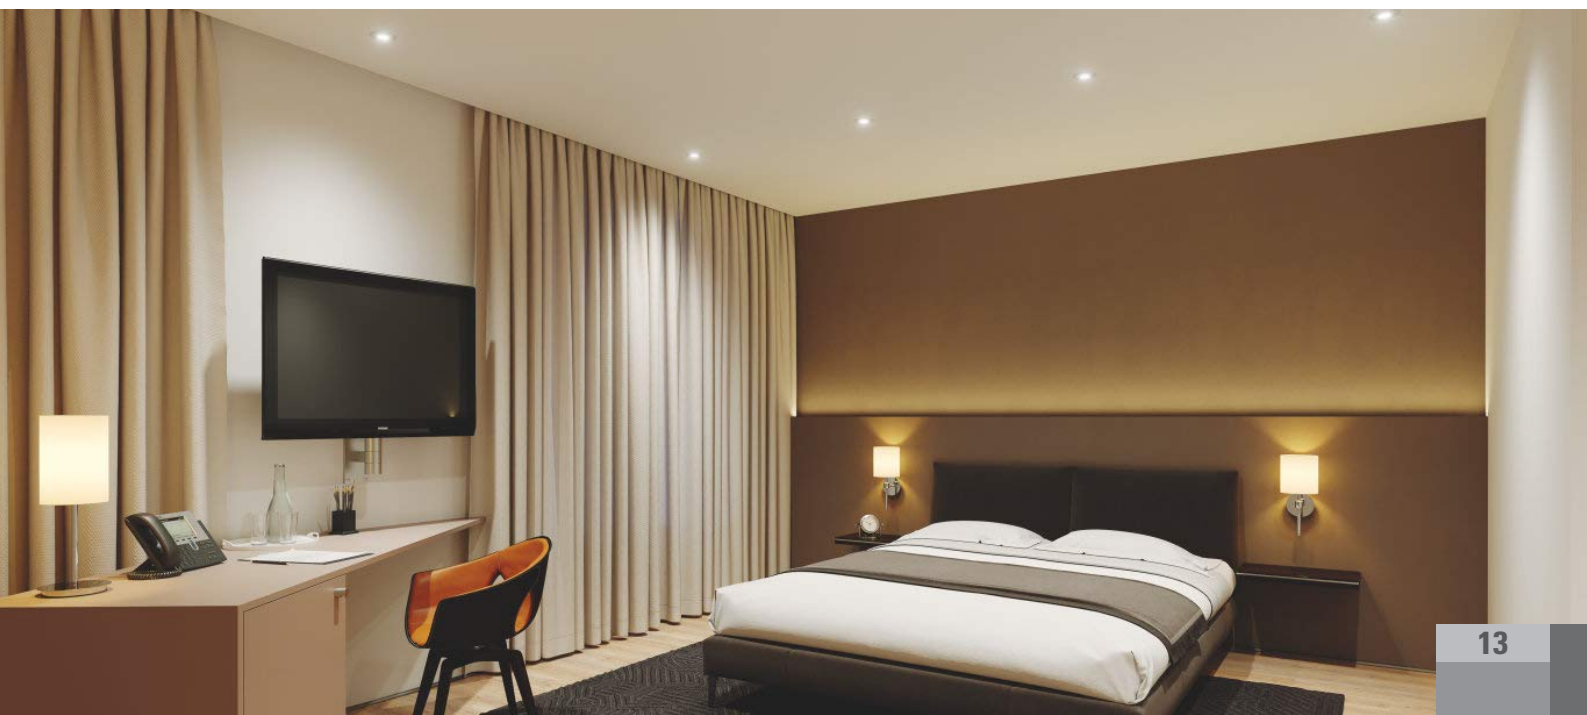




RL 1071

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24° | 38° | 38°
BODY COLOR: White, Black
MOUNTING: Recessed


POWER: 8W | 14W | 21W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 90-100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 5033

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 45°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 9W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 5033-16

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 45°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 9W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 22311

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 9W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K
LUMENS OUTPUT: 85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 9356

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 36°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 9W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 438

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh+Bk
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 90512B

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: WH, BK, BK+GD, WH+GD
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 90624B

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: WH, BL, BL+GD, WH+GD
MOUNTING: Recessed


POWER: 2X15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 92225

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed

POWER: 25W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram




RL 92350

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed

POWER: 2X25W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram






RL 10021R

HOUSING: Aluminium Die Casting
REFLECTOR: Lens
BEAM ANGLE: 45°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 9W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 90-95lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 10021S

HOUSING: Aluminium Die Casting
REFLECTOR: Lens
BEAM ANGLE: 45°
BODY COLOR: Wh, Bk
MOUNTING: Recessed

POWER: 9W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 90-95lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 10021S

HOUSING: Aluminium Die Casting
REFLECTOR: Lens
BEAM ANGLE: 45°
BODY COLOR: Wh, Bk
MOUNTING: Recessed




POWER: 2X9W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 90-95lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 1350

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh
MOUNTING: Recessed


POWER: 2X25W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 292

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 36°
BODY COLOR: White
MOUNTING: Recessed

POWER: 9W | 15W | 20W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram




RL 0312T

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh+Bk
MOUNTING: Recessed

POWER: 12W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 95lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram




CUTOUT: Ø126mm



RL 309

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 36°
BODY COLOR: Black
MOUNTING: Recessed

POWER: 7W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-90lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 309

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: White
MOUNTING: Recessed

POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 308 GU10

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BODY COLOR: Wh


POWER: 7W
COLOR TEMP: 3K
LUMENS OUTPUT: 100lm/w
IP RATING: IP20

LASER BLADE






CUTOUT: Ø45X45mm



RL 1408

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed

POWER: 8W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 63-70lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



CUTOUT: Ø102X26mm


RL 1406

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed

POWER: 10W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 63-70lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite




CUTOUT : Ø65X65mm



RL 1409

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed

POWER: 16W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 63-70lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite




CUTOUT: 198X26mm

Ø204mm

RL 1407

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed


POWER: 20W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 63-70lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 4125

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 5W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K
LUMENS OUTPUT: 70-80lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 4125

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 4125

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 20W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 4125

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 24W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 4125

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 30°
BODY COLOR: Wh, Bk
MOUNTING: Recessed


POWER: 36W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 1103

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh+Bk
MOUNTING: Recessed


POWER: 1X3W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 240lm
IP RATING: IP20
POWER FACTOR: >0.50
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Philips



RL 1105

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 45°
BODY COLOR: Wh+Bk
MOUNTING: Recessed


POWER: 5X2W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 60-70lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram / Range-Lite



RL 1106

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 45°
BODY COLOR: Wh+Bk
MOUNTING: Recessed


POWER: 10X2W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 60-70lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram / Range-Lite

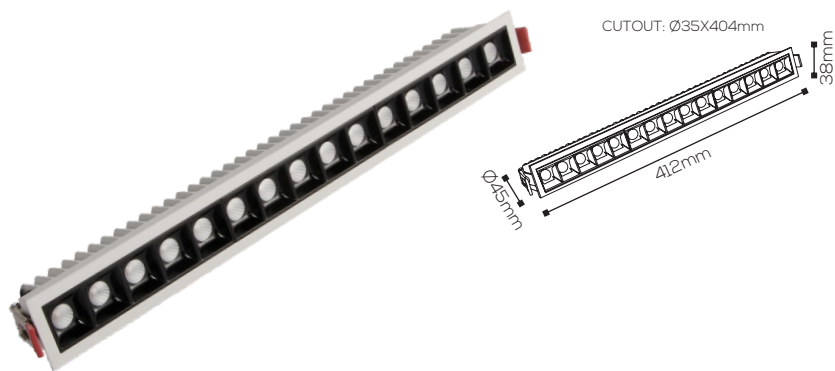

RL 1107

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 30°
BODY COLOR: Wh+Bk
MOUNTING: Recessed


POWER: 15X2W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 60-70lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

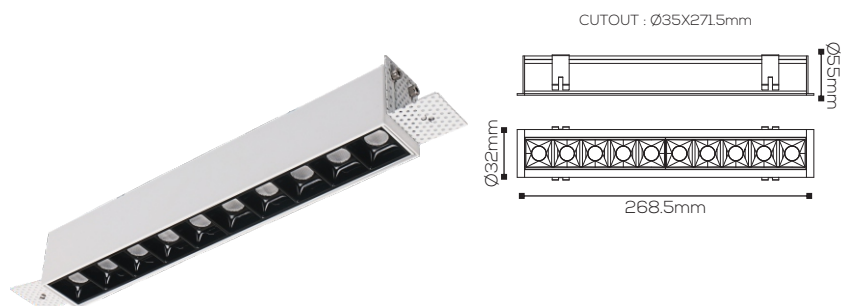

RL 5008

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 30°
BODY COLOR: Black
MOUNTING: Recessed

POWER: 10X2W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram / Fulham

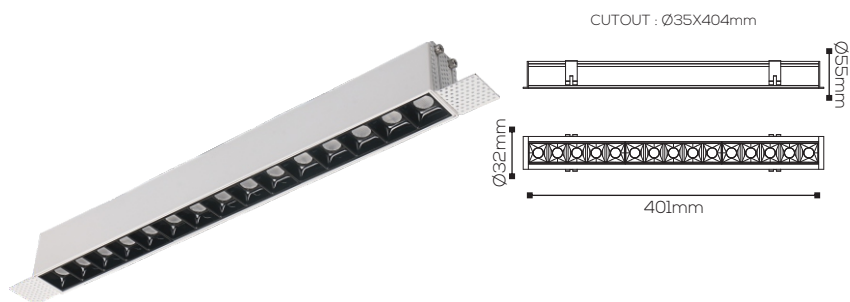

RL 5008




HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 30°
BODY COLOR: Black
MOUNTING: Recessed

POWER: 15X2W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram / Fulham





LED PANEL & DOWNLIGHT



RL 6308/6315/6322 R

HOUSING: Aluminium Die Casting

REFLECTOR: Diffuser

BEAM ANGLE: 110°

BODY COLOR: White

MOUNTING: Recessed

POWER: 8W | 15W | 22W

LIGHT SOURCE: Epistar

COLOR TEMP: 3K/4K/6K




LUMENS OUTPUT: 100-105lm/w

IP RATING: IP20

POWER FACTOR: >0.06 - >0.09

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 6308/6315/6322S

HOUSING: Aluminium Die Casting

REFLECTOR: Diffuser

BEAM ANGLE: 110°

BODY COLOR: White

MOUNTING: Recessed

POWER: 8W | 15W | 22W

LIGHT SOURCE: Epistar

COLOR TEMP: 3K/4K/6K





LUMENS OUTPUT: 100-105lm/w

IP RATING: IP20

POWER FACTOR: >0.06 - >0.09

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 15430/RL 15440/ RL 15450/RL 15460R

HOUSING: Aluminium Die Casting

REFLECTOR: Diffuser

BEAM ANGLE: 110°

BODY COLOR: White

MOUNTING: Recessed

POWER: 8W | 15W | 22W | 30W

LIGHT SOURCE: Epistar

COLOR TEMP: 3K/4K/6K





LUMENS OUTPUT: 100-105lm/w

IP RATING: IP20

POWER FACTOR: >0.65 - >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz




DRIVER: Range-lite



RL 15430/RL 15440/ RL 15450/RL 15460S

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Recessed




POWER: 8W | 15W | 22W | 30W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.65 - >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 888R

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Recessed




POWER: 7W | 16W | 24W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.09
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 888S

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Recessed




POWER: 7W | 16W | 24W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.09
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 270RD

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Recessed


POWER: 12W | 18W | 24W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K / CCT
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 270SQ

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Recessed

POWER: 12W | 18W | 24W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite




RL 37045/37048/37053

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 90°
BODY COLOR: White
MOUNTING: Recessed

POWER: 8W | 12W | 18W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

A photograph of a stone wall with three recessed ceiling lights. The wall is made of rough, stacked stones. The ceiling is a smooth, light-colored material. Three circular recessed lights are visible, each with a white lens. The text "WALL WASHER" is overlaid in the center in a white, serif font.


WALL WASHER



RL 1496

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: White
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 1089

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 40°
BODY COLOR: White
MOUNTING: Recessed


POWER: 15W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 95-100lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

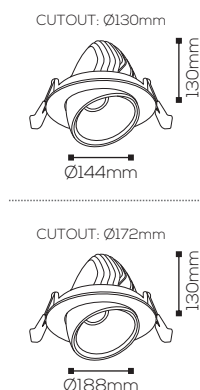


RL 1201

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Recessed

POWER: 30W | 50W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

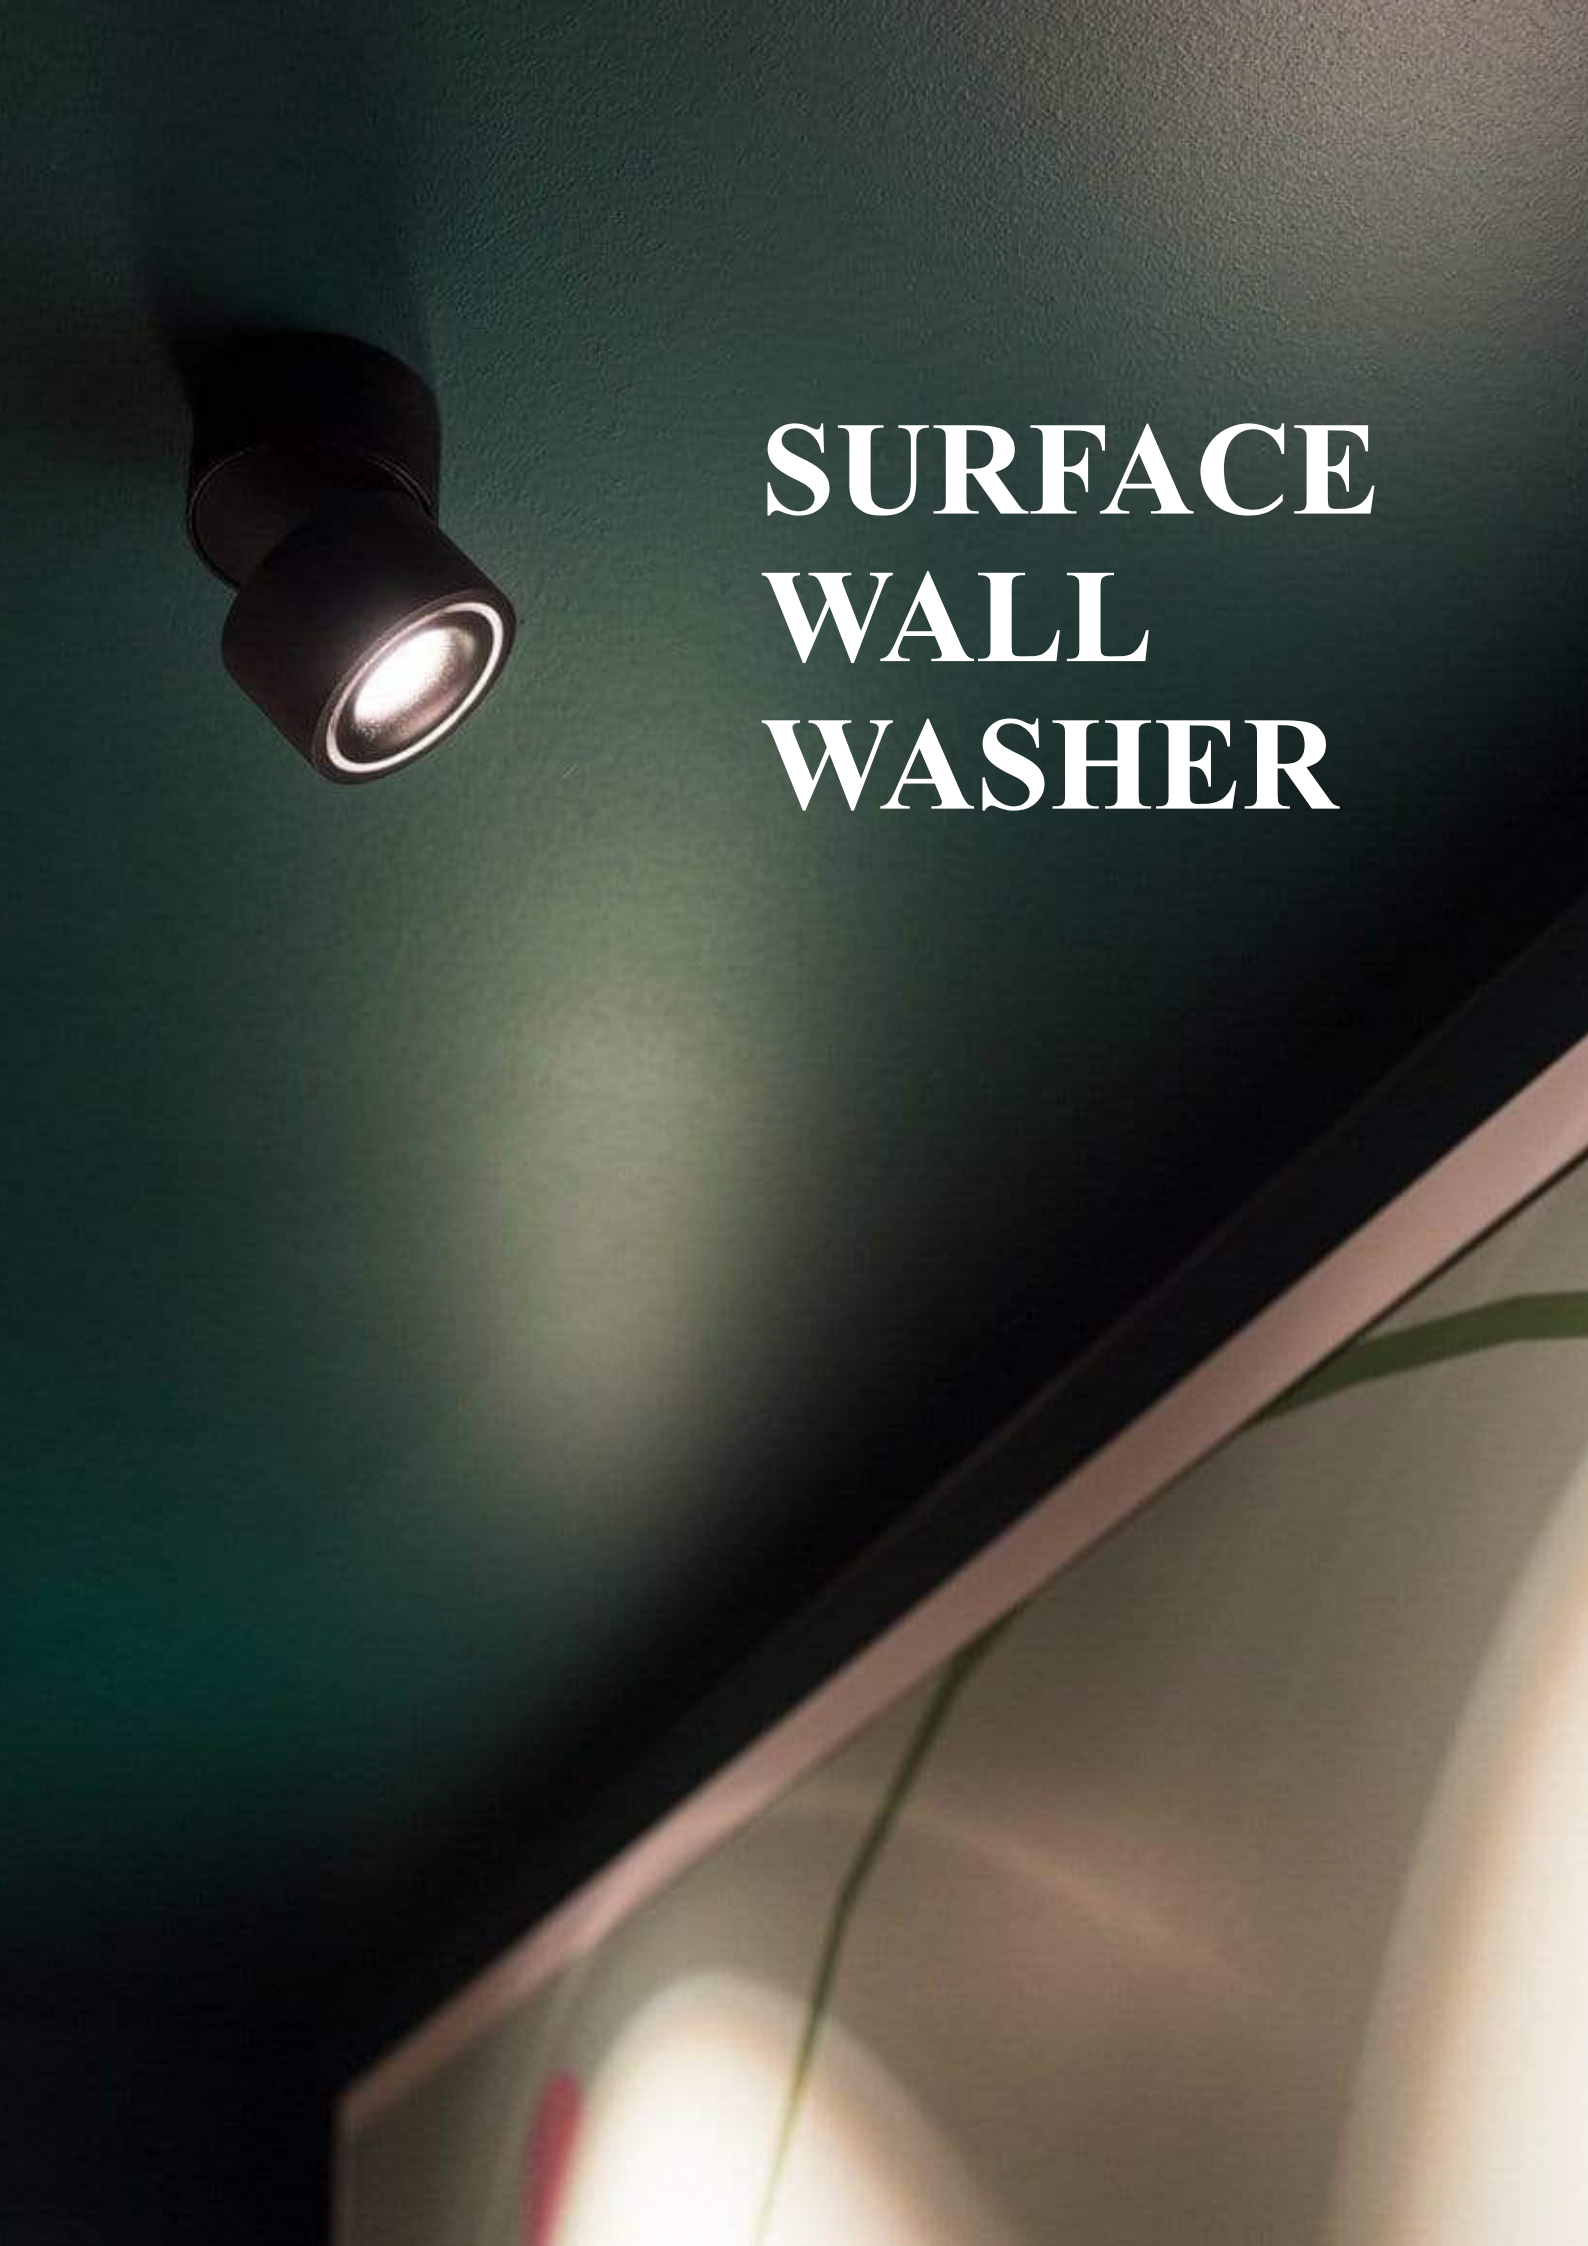


SURFACE WALL WASHER



RL 107B

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh, Bk
MOUNTING: Surface

POWER: 9W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 140

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Surface

POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 70110

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Surface

POWER: 7W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.80
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

A modern kitchen interior featuring a long, dark concrete island with a brushed metal backsplash. Three black bar stools are positioned under the island. The background includes a brick wall, a window with a white frame, and a colorful abstract painting. Three black cylindrical pendant lights hang from the ceiling. The floor is a polished, speckled grey material.


SURFACE LIGHT COB



RL 2023R

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 30°
BODY COLOR: Bk+Bk, Bk+Cop
MOUNTING: Surface

POWER: 5W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 80lm/w
IP RATING: IP20
POWER FACTOR: >0.60
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2024

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Bk+Bm, Bk+Cop
MOUNTING: Surface



POWER: 12W | 18W | 30W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20



POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram




RL 2707 / 2712 / 2715


HOUSING: Aluminium
REFLECTOR: Lens
BEAM ANGLE: 24° | 36° | 36°
BODY COLOR: Wh, Bk
MOUNTING: Surface



POWER: 7W | 12W | 15W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20




POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 6021

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Wh, Bk
MOUNTING: Surface


POWER: 8W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

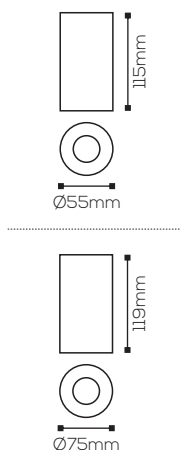

RL 3003

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 40°
BODY COLOR: Wh, Bk
MOUNTING: Surface


POWER: 9W | 18W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 3003

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 60°
BODY COLOR: Wh, Bk
MOUNTING: Surface

POWER: 20W/25W/30W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K / CCT
LUMENS OUTPUT: 95-105lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 161

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Surface


POWER: 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 70183

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 36°
BODY COLOR: White
MOUNTING: Surface


POWER: 12W | 18W | 30W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 95-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 526

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Surface



POWER: 30W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 95-100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 2025

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 60°
BODY COLOR: Wh, Bk
MOUNTING: Surface



POWER: 12W | 18W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 90-100lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

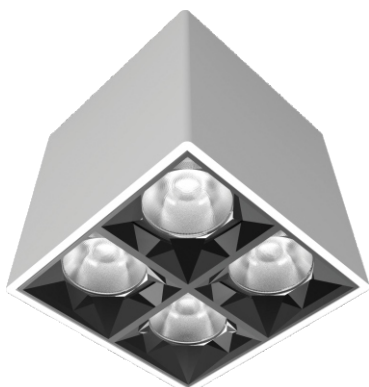

RL 4022

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Surface

POWER: 15W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K
LUMENS OUTPUT: 95lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram

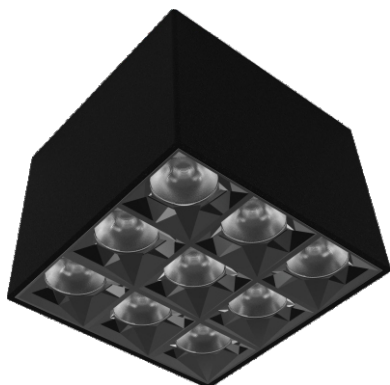

RL 4022

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: Surface

POWER: 40W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K
LUMENS OUTPUT: 95lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram


HANGING LIGHT



RL 23226

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Black
MOUNTING: Surface

POWER: 7W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 50-60lm/w
IP RATING: IP20
POWER FACTOR: >0.60
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite




RL 43255

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Black
MOUNTING: Surface

POWER: 10W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

SURFACE LIGHT SMD



RL 11011

HOUSING: Aluminium Die Casting

REFLECTOR: Diffuser

BEAM ANGLE: 24°

BODY COLOR: Wh, Bk

MOUNTING: Surface

POWER: 5W


LIGHT SOURCE: Cree

COLOR TEMP: 3K/4K

LUMENS OUTPUT: 100lm/w

IP RATING: IP20

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz



RL 199

HOUSING: Aluminium

REFLECTOR: Diffuser

BEAM ANGLE: 100°

BODY COLOR: Wh, Bk

MOUNTING: Surface

POWER: 10W | 15W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K/6K


LUMENS OUTPUT: 100-110lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz


DRIVER: Osram

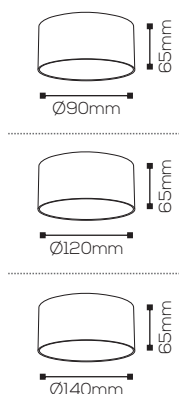

RL 812

HOUSING: Aluminium
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: Wh, Bk
MOUNTING: Surface


POWER: 8W | 12W | 18W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

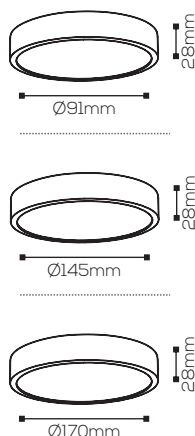

RL 16030/16040/16060R

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Surface

POWER: 8W | 15W | 22W | 30W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite


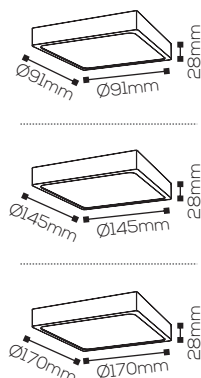


RL 16030/16040/16060S

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 110°
BODY COLOR: White
MOUNTING: Surface

POWER: 8W | 15W | 22W
LIGHT SOURCE: Epistar
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-105lm/w
IP RATING: IP20
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

TRACK LIGHT



RL 4003

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: Wh, Bk
MOUNTING: T2 Track



POWER: 12W | 20W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 4004

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 38°
BODY COLOR: White, Black
MOUNTING: T2 Track


POWER: 20/25/30W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 95-100lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 6045 / RL 6046

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 36° | 40°
BODY COLOR: Wh, Bk
MOUNTING: T2 Track

POWER: 9W | 15W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



RL 6038 / RL 6047

HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 40°
BODY COLOR: Wh, Bk
MOUNTING: T2 Track

POWER: 20W | 35W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/4K/5K/6K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Osram



1MTR/2MTR TRACK (2 Line)



HOUSING: Aluminium
REFLECTOR: Aluminium Anodized
BODY COLOR: Wh, Bk

48V - MAGNETIC



TRACK LIGHT



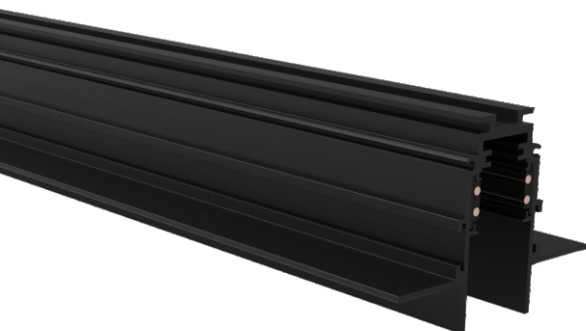

RL 4020B

20MM ALUMINIUM MAGNETIC PROFILE

HOUSING: Aluminium



BODY COLOR: Black

MOUNTING: Recessed

DIMENSION: Ø1000X72X54.7(H)MM

DIMENSION: Ø2000X72X54.7(H)MM

DIMENSION: Ø3000X72X54.7(H)MM

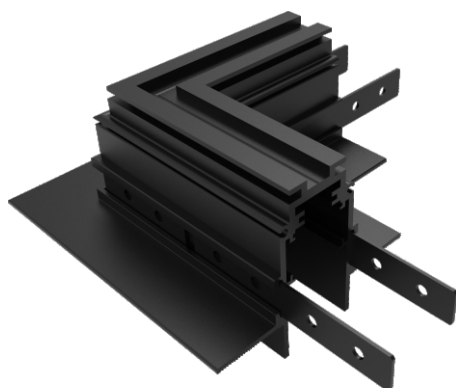

RL 4028



20MM ALUMINIUM CORNER-90°

HOUSING: Aluminium

BODY COLOR: Black

MOUNTING: Recessed

DIMENSION: Ø100X100(H)MM

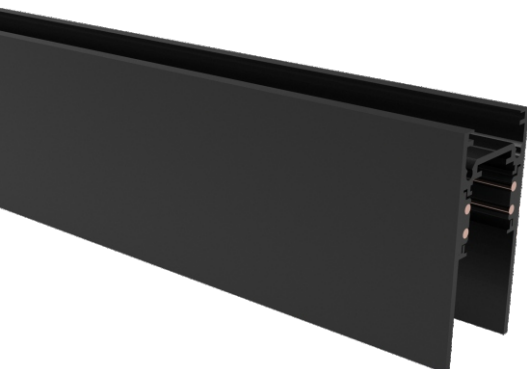

RL 4055

20MM ALUMINIUM MAGNETIC PROFILE

HOUSING: Aluminium



BODY COLOR: Black

MOUNTING: Surface

DIMENSION: Ø1000X24.6X51(H)MM

DIMENSION: Ø2000X24.6X51(H)MM

DIMENSION: Ø3000X24.6X51(H)MM

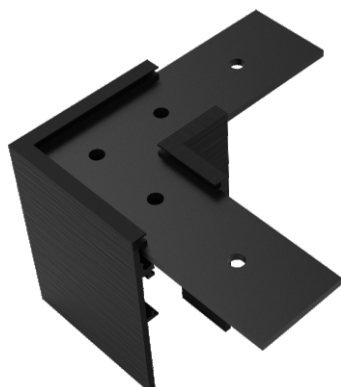


RL 4057

20MM SURFACE ALUMINIUM CORNER-90°

HOUSING: Aluminium

BODY COLOR: Black


MOUNTING: Surface



RL 4021

20MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Black


POWER: 9W
LIGHT SOURCE: Luminus
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-90lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



RL 4022

20MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Black


POWER: 9W
LIGHT SOURCE: Luminus
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-90lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



RL 4023

20MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 24°
BODY COLOR: Black

POWER: 6W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K / CCT
LUMENS OUTPUT: 80-90lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC




RL 4023

20MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 24°
BODY COLOR: Black

POWER: 12W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K / CCT
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC





RL 4023D

20MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 120°
BODY COLOR: Black

POWER: 6W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC

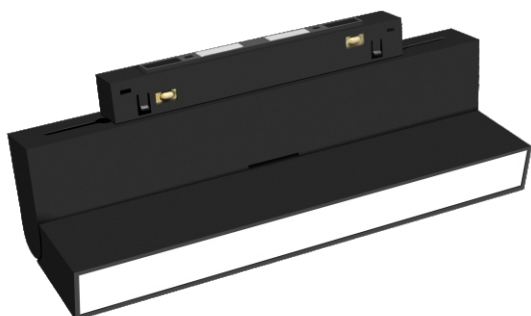


RL 4023D

20MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 120°
BODY COLOR: Black


POWER: 12W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC

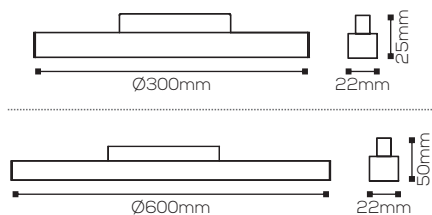

RL 4024

20MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Diffuser
BEAM ANGLE: 120°
BODY COLOR: Black


POWER: 10W | 20W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K / CCT
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



RL 4025

20MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 24°
BODY COLOR: Black


POWER: 6X1W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K / CCT
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



RL 4025

20MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized + Lens
BEAM ANGLE: 24°
BODY COLOR: Black

POWER: 12X1W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K / CCT
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC

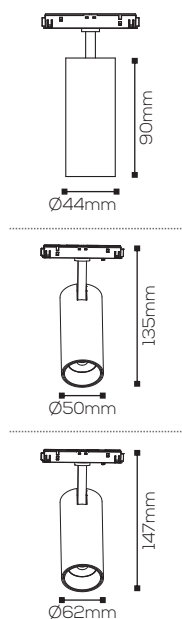


RL 4026

20MM MAGNETIC TRACK
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Black

POWER: 7W | 12W | 20W
LIGHT SOURCE: Luminus
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



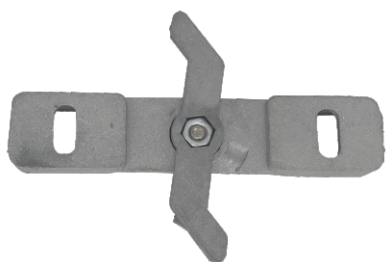

RL 4056

SURFACE KIT



RL 4057

HANGING KIT



RL 4029

STRAIGHT CONNECTION



RL 4029

INPUT MODULE
DIMENSION: Ø17X16X98MM



RL 4029


CORNER MODULE
DIMENSION: 17X16X98MM

The lighting



that glows.





RL 4035B

35MM ALUMINIUM MAGNETIC PROFILE

HOUSING: Aluminium



BODY COLOR: Black

MOUNTING: Recessed

DIMENSION: Ø1000x84x76.9(H)MM

DIMENSION: Ø2000x84x76.9(H)MM

DIMENSION: Ø3000x84x76.9(H)MM

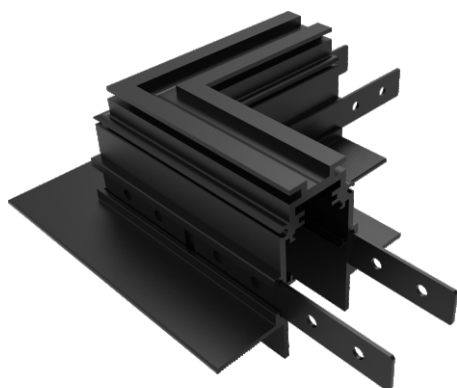

RL 4041



35MM ALUMINIUM CORNER-90°

HOUSING: Aluminium Die Casting

BODY COLOR: Black

MOUNTING: Recessed

DIMENSION: Ø100X100(H)MM

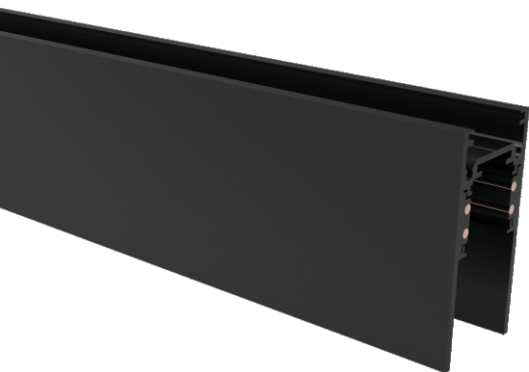

RL 4065

35MM ALUMINIUM MAGNETIC PROFILE

HOUSING: Aluminium



BODY COLOR: Black

MOUNTING: Surface

DIMENSION: Ø1000x38x79.3(H)MM

DIMENSION: Ø2000x38x79.3(H)MM

DIMENSION: Ø3000x38x79.3(H)MM

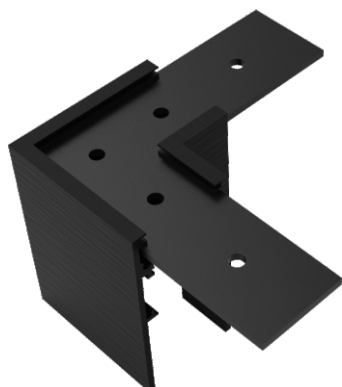


RL 4065L

35MM SURFACE ALUMINIUM CORNER-90°

HOUSING: Aluminium

BODY COLOR: Black

MOUNTING: Surface

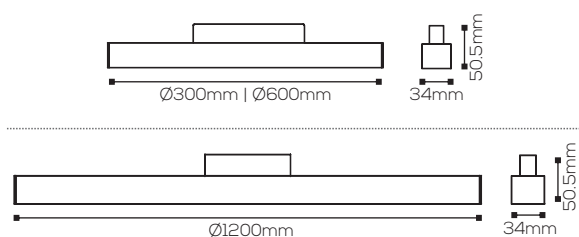

RL 4036

35MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting

REFLECTOR: Diffuser

BEAM ANGLE: 180°

BODY COLOR: Black

POWER: 12W | 20W | 40W

LIGHT SOURCE: Osram


COLOR TEMP: 3K/4K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 48V DC



RL 4037

35MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 24°

BODY COLOR: Black

POWER: 5X2W

LIGHT SOURCE: Osram



COLOR TEMP: 3K/4K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 48V DC

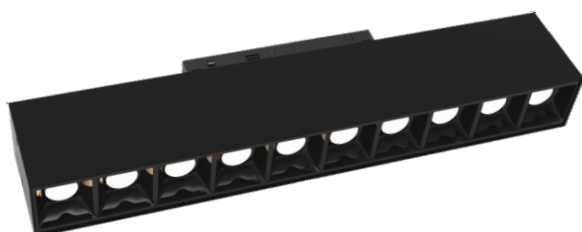

RL 4037

35MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 24°

BODY COLOR: Black

POWER: 10X2W

LIGHT SOURCE: Osram



COLOR TEMP: 3K/4K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP20

POWER FACTOR: >0.95


INPUT VOLTAGE: 48V DC

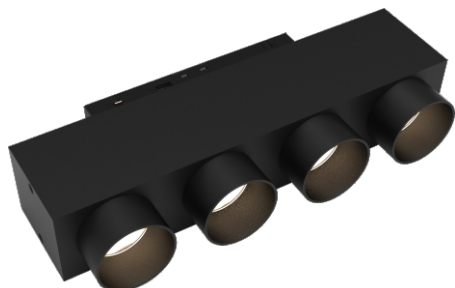

RL 4038

35MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Black


POWER: 4X2W
LIGHT SOURCE: Osram
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC

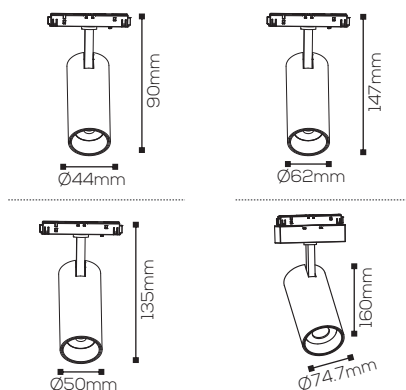

RL 4039

35MM MAGNETIC TRACK
HOUSING: Aluminium Die Casting
BEAM ANGLE: 24°
BODY COLOR: Black


POWER: 7W | 12W | 20W | 30W
LIGHT SOURCE: Luminus
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



RL 4042

35MM MAGNETIC MODULE
HOUSING: Aluminium Die Casting
REFLECTOR: Aluminium Anodized
BEAM ANGLE: 24°
BODY COLOR: Black

POWER: 9W
LIGHT SOURCE: Luminus
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP20
POWER FACTOR: >0.95
INPUT VOLTAGE: 48V DC



RL 4043

35MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 24°

BODY COLOR: Black

POWER: 9W

LIGHT SOURCE: Luminus


COLOR TEMP: 3K/4K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 48V DC



RL 4044

35MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 24°

BODY COLOR: Black

POWER: 5X2W

LIGHT SOURCE: Osram


COLOR TEMP: 3K/4K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 48V DC



RL 4044

35MM MAGNETIC MODULE

HOUSING: Aluminium Die Casting

REFLECTOR: Aluminium Anodized

BEAM ANGLE: 24°

BODY COLOR: Black

POWER: 10X2W

LIGHT SOURCE: Osram

COLOR TEMP: 3K/4K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP20

POWER FACTOR: >0.95

INPUT VOLTAGE: 48V DC



LED STRIP LIGHT

SR. NO	MODEL NO.	SPECIFICATION	WATTAGE	SIZE	COLOR TEMP.
12V DC INDOOR					
1	RL2835-120LED	2835-120 LED 0.1W LED	12W	10mm	WW,NW
2	RL2835-180LED	2835-180 LED 0.1W LED	18W	10mm	WW,NW
3	RL2835-240LED	2835-240 LED 0.1W LED	24W	10mm	WW,NW
12V DC OUTDOOR					
4	RL5050-60LED-IP 68	5050-60 LED 0.25W LED	15W	10mm	WW

TECHNICAL PARAMETERS



Working temperature	-20-600C	Working voltage	3V (AAA*2PCS)
Sleep current	<25uA	Emission current	<30mA
Sleep power consumption	<75uW	Emission power consumption	<90mW
Net weight	55g	Dimension	L148*W40*38 (mm)
RF distance	≤30m	RF frequency	2.4GHz
Accessories	Remote control rack, 3M foam sponge glue, M4 double-headed self-tapping screws, 6 expansion tube, battery, manual		


DIRECTION FOR USE



Name of key	Description
ON	ON in any time
OFF	OFF in any time
Mode	3 static modes: warm white, cool white, pure white
Brightness +	The brightness will add 1 level after each time press. Long-press can get fast adjusting.
Brightness -	The brightness will reduce 1 level after each time press. Long-press can get fast adjusting.
CW balance key	Balance to cool white. Long-press can get fast adjusting.
WW balance key	Balance to warm white. Long-press can get fast adjusting.
Zone selection key	Selection for the control zone (The corresponding zone indicator will light up when selected, support single zone control and overall control)



12V POWER SUPPLY - NON WATERPROOF				
SR.NO	MODEL NO.	SPECIFICATION	WATTAGE	VOLTAGE
1	RL6602	2 AMP	24W	12VDC
2	RL6602	5 AMP	60W	12VDC
3	RL6602	8.3 AMP	100W	12VDC
4	RL6602	10 AMP	120W	12VDC
5	RL6602	12.5 AMP	150W	12VDC



24V POWER SUPPLY - NON WATERPROOF				
SR.NO	MODEL NO.	SPECIFICATION	WATTAGE	OUTPUT VOLTAGE
1	RL6603	2.5 AMP	60W	24V
2	RL6603	6.25 AMP	150W	24V
3	RL6603	8.3 AMP	200W	24V



FASECUT DIMMABLE DRIVER				
SR.NO	WATTAGE	MODEL NO	OUTPUT CURRENT	SPECIFICATION
1	8W	ALD08-40022	200mA	DC 8-40V MAX50V
2	12W	ALD12-43025	300mA	DC 8-40V MAX50V
3	15W	ALD15-4035	350mA	DC 8-40V MAX50V
4	20W	ALD18-40050	500mA	DC 8-40V MAX50V




DALI DIMMABLE DRIVER				
SR.NO	WATTAGE	MODEL NO	OUTPUT CURRENT	SPECIFICATION
1	8-15W	ALD08-43022DA	200-350mA	DC 20-43V MAX50V
2	18-26W	ALD15-43038DA	550-700mA	DC 20-43V MAX50V



DALI CCT DT8 DRIVER				
SR.NO	WATTAGE	MODEL NO	OUTPUT CURRENT	SPECIFICATION
1	6-12W	LFGSD020YK	150-400mA	DC 9-42V MAX59V
2	15-25W	LFGSD020YK	350-700mA	DC 9-42V MAX59V



48V SMPS			
SR.NO	WATTAGE	MODEL NO	OUTPUT VOLTAGE
1	100W	LRS100	48V
2	150W	LRS150	48V



48V DRIVER FOR 15MM MAGNETIC TRACK			
SR.NO	WATTAGE	MODEL NO	OUTPUT VOLTAGE
1	80W	48V-80W-15D	80W
2	150W	48V-150W-15D	150W



48V DRIVER FOR 20MM / 35MM MAGNETIC TRACK			
SR.NO	WATTAGE	MODEL NO	OUTPUT VOLTAGE
1	100W	48V-100W-20D	100W
2	200W	48V-200W-20D	200W

OUTDOOR LIGHTS



A photograph of a house at night. The house has light green horizontal siding and a white-framed window with dark shutters. A black lantern-style light fixture is mounted on the wall above the window. In the foreground, there is a green lawn. To the left, a pile of firewood is stacked on a wooden platform. Next to the firewood is a wooden stand with a coiled green hose. To the right, there are several potted plants, including hydrangeas in orange pots. Two black bollard lights with white glowing tops are placed on a stone border in the grass. The text "LED WALL & BOLLARD LIGHT" is overlaid in white serif font on a dark horizontal band across the middle of the image.

LED WALL & BOLLARD LIGHT

RL 1821

HOUSING: Aluminium + PC

BEAM ANGLE: 117°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K




LUMENS OUTPUT: 521lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

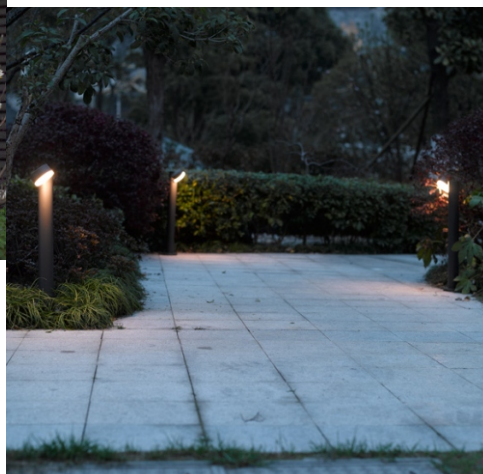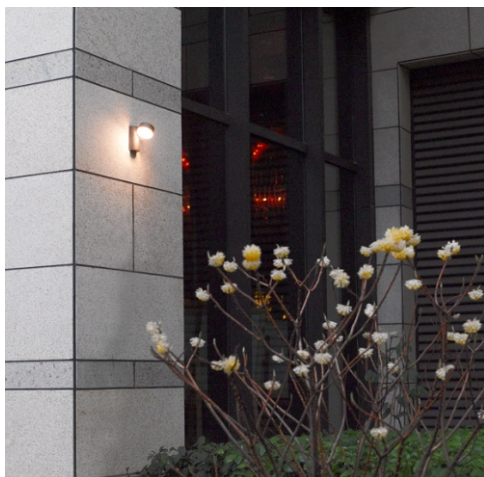

RL 1822

HOUSING: Aluminium + PC

BEAM ANGLE: 117°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 521lm


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

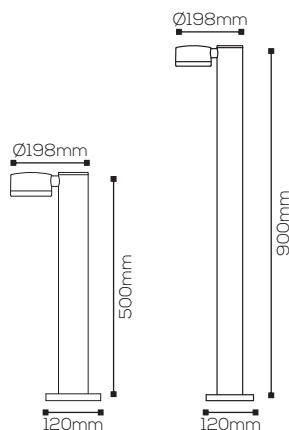



RL 1891

HOUSING: Aluminium + Glass

BEAM ANGLE: 55°

BODY COLOR: Dark Grey

POWER: 7W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K

LUMENS OUTPUT: 477lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1892

HOUSING: Aluminium + Glass

BEAM ANGLE: 55°

BODY COLOR: Dark Grey

POWER: 7W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 477lm


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

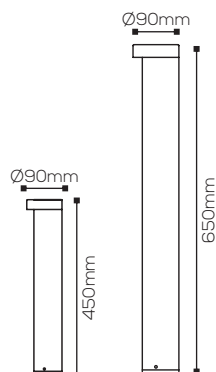



RL 9395

HOUSING: Aluminium + PC

BEAM ANGLE: 110°

BODY COLOR: Dark Grey

POWER: 4W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 48lm

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

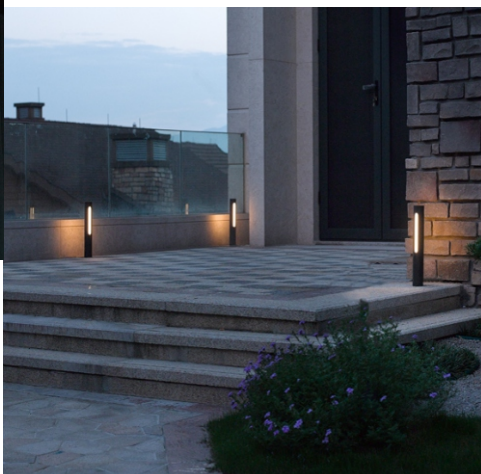

RL 9396 / RL 9397

HOUSING: Aluminium + PC

BEAM ANGLE: 110°

BODY COLOR: Dark Grey

POWER: 5W / 10W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 60lm / 117lm


IP RATING: IP54

POWER FACTOR: >0.4-50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

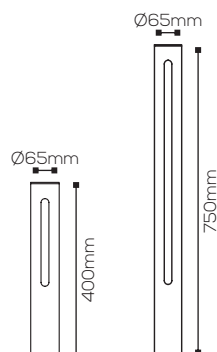



RL 2322

HOUSING: Aluminium + PC

BEAM ANGLE: 107°

BODY COLOR: Dark Grey

POWER: 7W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K



LUMENS OUTPUT: 493lm

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

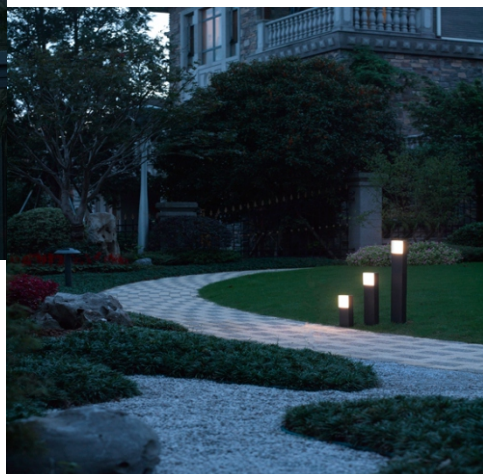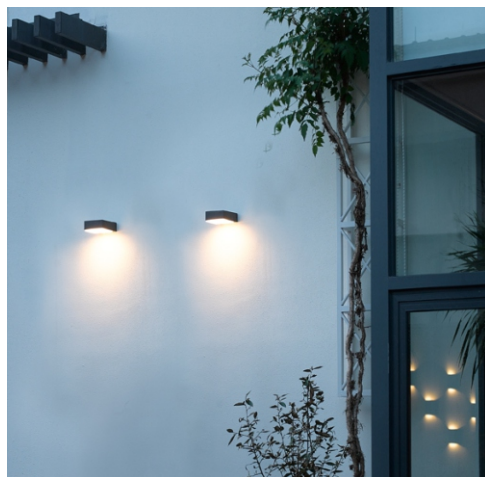

RL 2323

HOUSING: Aluminium + PC

BEAM ANGLE: 107°

BODY COLOR: Dark Grey

POWER: 7W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 493lm


IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

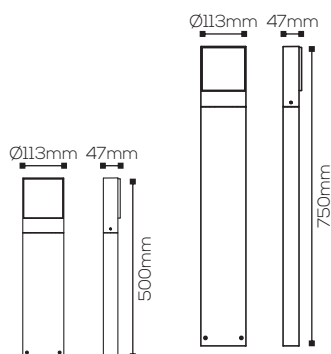



RL 2052

HOUSING: Aluminium + PC

BEAM ANGLE: 113°

BODY COLOR: Dark Grey

POWER: 8W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K



LUMENS OUTPUT: 709lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

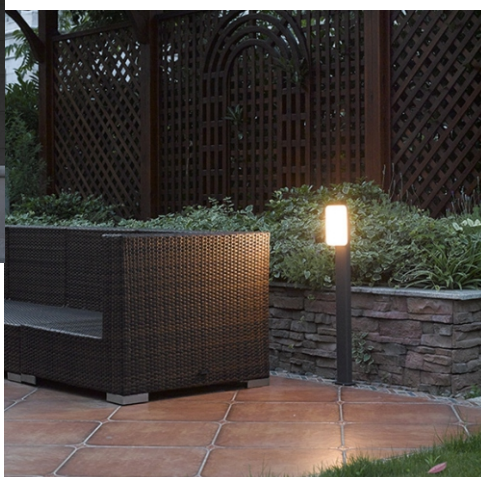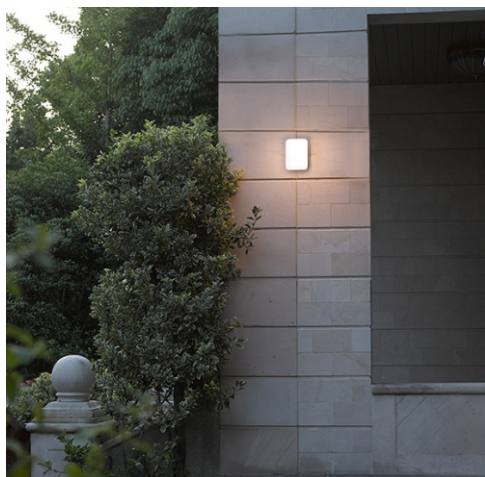

RL 2054 / RL 2055

HOUSING: Aluminium + PC

BEAM ANGLE: 113°

BODY COLOR: Dark Grey

POWER: 8W / 16W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 709lm | 1418lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

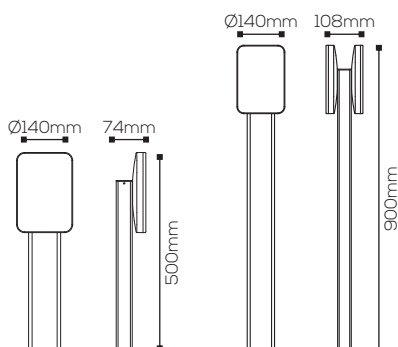

RL 2371

HOUSING: Aluminium + PC

BEAM ANGLE: 108°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 833lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2372

HOUSING: Aluminium + PC

BEAM ANGLE: 108°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K



LUMENS OUTPUT: 833lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

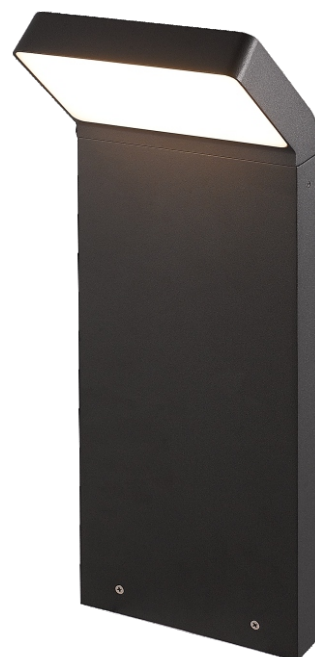

RL 2801

HOUSING: Aluminium Die Casting

BEAM ANGLE: 44°

BODY COLOR: Dark Grey

POWER: 12W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K




LUMENS OUTPUT: 589lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

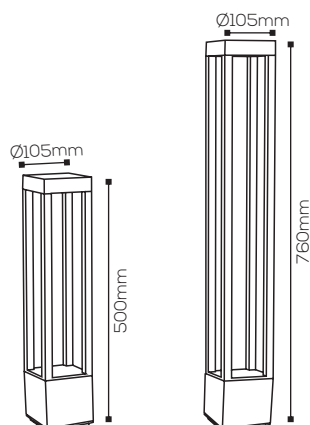

RL 2803

HOUSING: Aluminium Die Casting

BEAM ANGLE: 175°

BODY COLOR: Dark Grey

POWER: 12W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K



LUMENS OUTPUT: 589lm


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

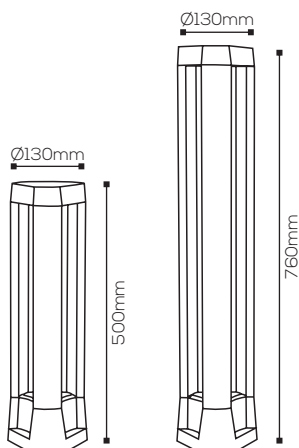



RL 2802 / RL 8347

HOUSING: Aluminium Die Casting

BEAM ANGLE: 91°

BODY COLOR: Dark Grey

POWER: 10W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K



LUMENS OUTPUT: 589lm


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

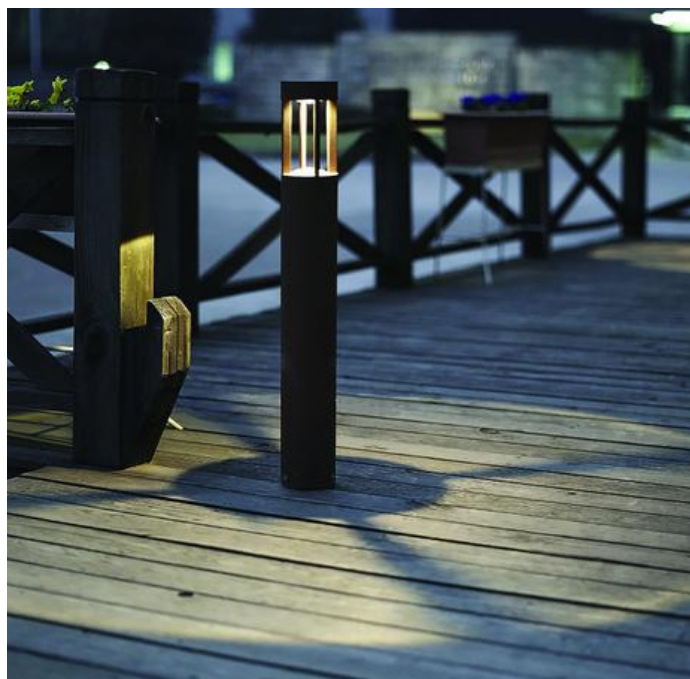



RL 1982

HOUSING: Aluminium + PC

BEAM ANGLE: 43°

BODY COLOR: Dark Grey

POWER: 3X6W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K




LUMENS OUTPUT: 1018lm


IP RATING: IP65

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

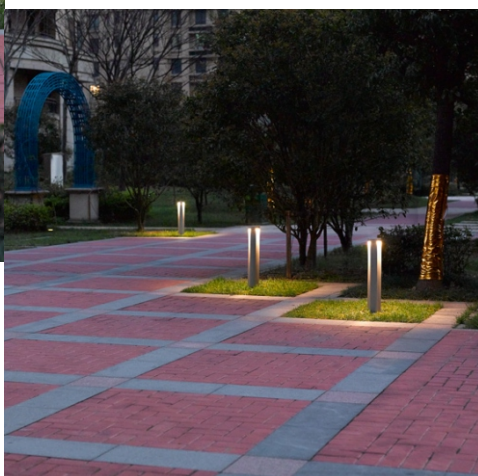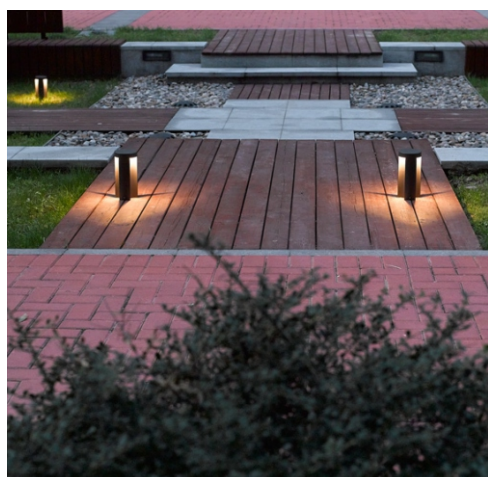



RL 0225 / RL 0260

HOUSING: Aluminium Die Casting

BEAM ANGLE: 92°

BODY COLOR: Dark Grey

POWER: 10W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K



LUMENS OUTPUT: 695lm


IP RATING: IP65

POWER FACTOR: >0.80

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

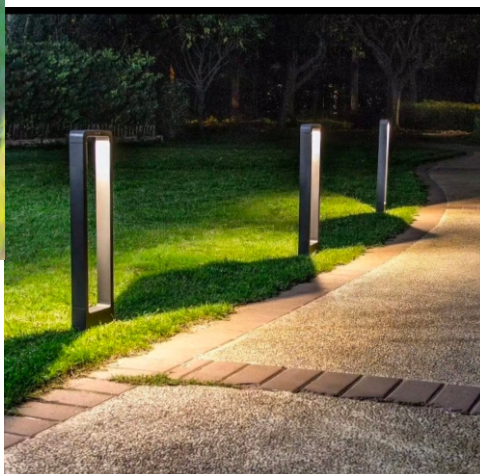



RL 5567

HOUSING: Aluminium Die Casting + PC

BEAM ANGLE: 360°

BODY COLOR: Dark Grey

POWER: 12W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 569lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

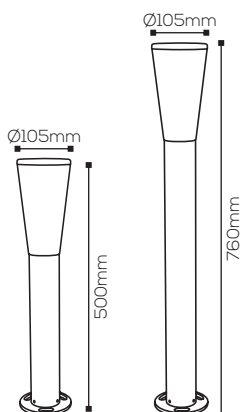

RL 2511

HOUSING: Aluminium + PC

BEAM ANGLE: 360°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K



LUMENS OUTPUT: 389lm

IP RATING: IP65

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

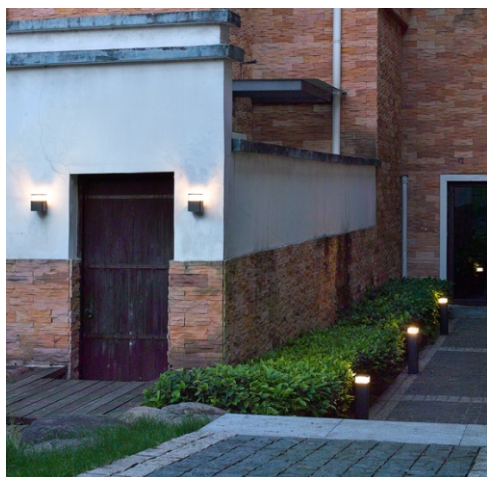

RL 2512

HOUSING: Aluminium + PC

BEAM ANGLE: 360°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 389lm


IP RATING: IP65

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

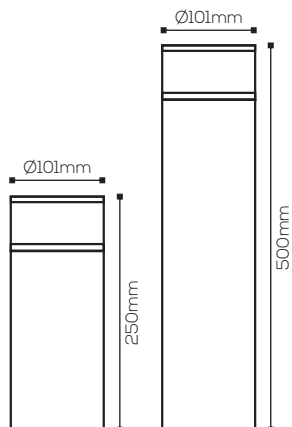



RL 2804

HOUSING: Aluminium Die Casting

BEAM ANGLE: 360°

BODY COLOR: Dark Grey

POWER: 12W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 780lm


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

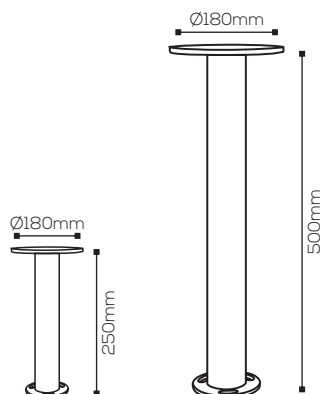



RL 2492

HOUSING: Aluminium + PC

BEAM ANGLE: 360°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 814lm

IP RATING: IP65

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2131

HOUSING: Aluminium + PC

BEAM ANGLE: 219°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K



LUMENS OUTPUT: 1129lm


IP RATING: IP65

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

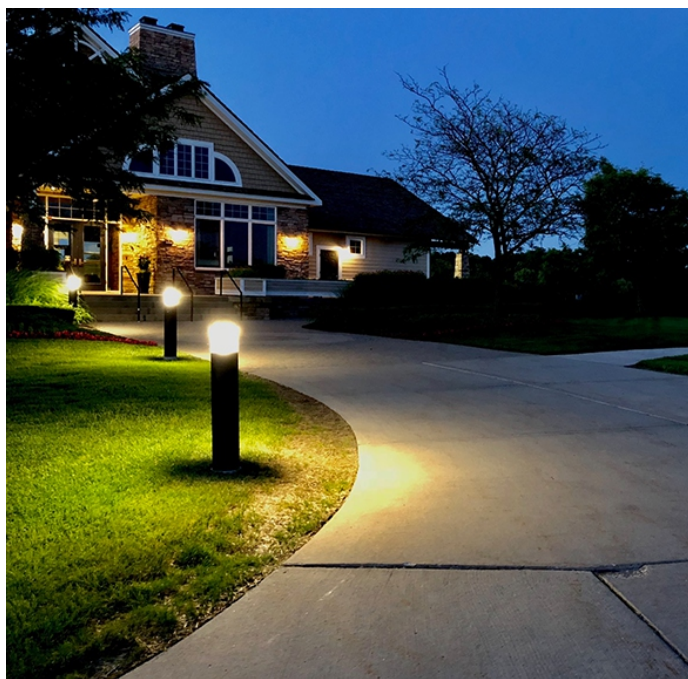



RL 1722A

HOUSING: Aluminium + PC

BEAM ANGLE: 357°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 365lm


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

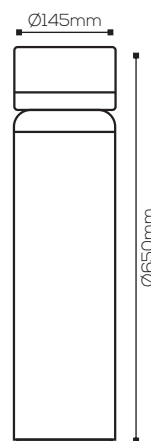



RL 2091

HOUSING: Aluminium + PC

BEAM ANGLE: 354°

BODY COLOR: Dark Grey

POWER: 18W / 27W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K



LUMENS OUTPUT: 1070lm / 1600lm

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

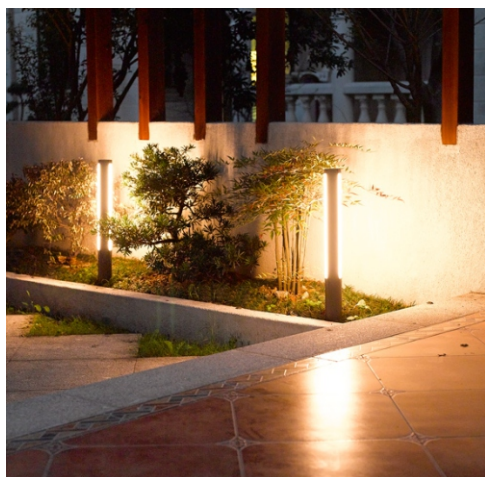

RL 1793

HOUSING: Aluminium Die Casting

BEAM ANGLE: 146°

BODY COLOR: Dark Grey

POWER: 50W/100W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K

LUMENS OUTPUT: 70-80lm/w

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1793-3000

HOUSING: Aluminium Die Casting

BEAM ANGLE: 146°

BODY COLOR: Dark Grey

POWER: 50W/100W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-80lm/w

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

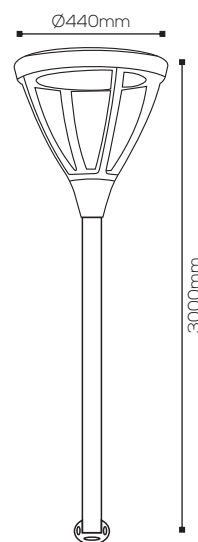




RL 3665

HOUSING: Aluminium Die Casting
BODY COLOR: Dark Grey


POWER: E27 CFL
IP RATING: IP54




RL 2665

HOUSING: Aluminium Die Casting
BODY COLOR: Dark Grey

POWER: E27 CFL
IP RATING: IP54





RL 1903

HOUSING: Aluminium Die Casting

BEAM ANGLE: 105°

BODY COLOR: Dark Grey


POWER: 5W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K

LUMENS OUTPUT: 350lm

IP RATING: IP65



RL 1904

LED SOLAR BOLLARD LIGHT

HOUSING: Aluminium Die Casting

BEAM ANGLE: 105°

BODY COLOR: Dark Grey

POWER: 5W


LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K

LUMENS OUTPUT: 350lm

IP RATING: IP65





RL 2280

HOUSING: Aluminium Die Casting

BEAM ANGLE: 360°

BODY COLOR: Dark Grey

POWER: 60W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K/6K


LUMENS OUTPUT: 70-80lm/w

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

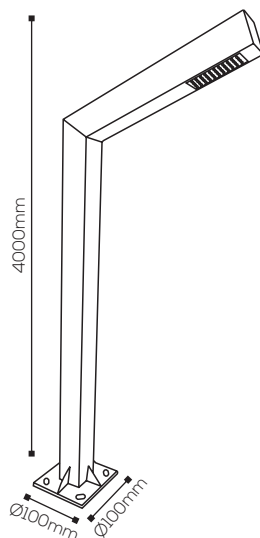

RL 2279

HOUSING: Aluminium Die Casting

BEAM ANGLE: 90°

BODY COLOR: Dark Grey

POWER: 60W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3K/4K/6K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54


POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite






LED GATE LIGHT



RL 2552

HOUSING: Aluminium Die Casting
BEAM ANGLE: 146°
BODY COLOR: Black


POWER: 10W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 630lm
IP RATING: IP54
POWER FACTOR: >0.80
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2667 / RL 2668

HOUSING: Aluminium Die Casting
BODY COLOR: Dark Grey


POWER: 12W / 15W
IP RATING: IP54
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 60-70lm/w
IP RATING: IP54
POWER FACTOR: >0.70
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2666

HOUSING: Aluminium Die Casting
BODY COLOR: Dark Grey


POWER: E27 CFL
IP RATING: IP54



RL 3622

HOUSING: Aluminium Die Casting
BODY COLOR: Dark Grey

POWER: E27 CFL
IP RATING: IP54




RL 2622

HOUSING: Aluminium Die Casting
BODY COLOR: Dark Grey

POWER: E27 CFL
IP RATING: IP54




LED WALL LIGHT



RL 2061

HOUSING: Aluminium + PC
BEAM ANGLE: 117°
BODY COLOR: Dark Grey


POWER: 6W
LIGHT SOURCE: Everlight
COLOR TEMP: 3000K
LUMENS OUTPUT: 615lm
IP RATING: IP54
POWER FACTOR: >0.7
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1901

HOUSING: Aluminium + PC
BEAM ANGLE: 117°
BODY COLOR: Dark Grey


POWER: 6W
LIGHT SOURCE: Everlight
COLOR TEMP: 3000K
LUMENS OUTPUT: 433lm
IP RATING: IP54
POWER FACTOR: >0.7
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2101

HOUSING: Aluminium + PC
BEAM ANGLE: 116°
BODY COLOR: Dark Grey

POWER: 9W
LIGHT SOURCE: Everlight
COLOR TEMP: 3000K
LUMENS OUTPUT: 943lm
IP RATING: IP65
POWER FACTOR: >0.7
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2551

HOUSING: Aluminium + PC

BEAM ANGLE: 115°

BODY COLOR: Dark Grey

POWER: 10W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 946lm

IP RATING: IP54

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2601

HOUSING: Aluminium + PC

BEAM ANGLE: 100°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 632lm

IP RATING: IP65

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2341

HOUSING: Aluminium + Glass

BEAM ANGLE: 90°

BODY COLOR: Dark Grey

POWER: 11W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 668lm

IP RATING: IP65

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2271

HOUSING: Aluminium + Glass

BEAM ANGLE: 271°

BODY COLOR: Dark Grey

POWER: 7W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 461lm

IP RATING: IP54

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2381

HOUSING: Aluminium + Glass

BEAM ANGLE: 86°

BODY COLOR: Dark Grey

POWER: 10W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 820lm

IP RATING: IP54

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1991

HOUSING: Aluminium + Glass

BEAM ANGLE: 90°

BODY COLOR: Dark Grey

POWER: 2X6W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 894lm

IP RATING: IP65

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1861

HOUSING: Aluminium + Glass

BEAM ANGLE: 25°

BODY COLOR: Dark Grey

POWER: 3X1W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 223lm

IP RATING: IP54

POWER FACTOR: >0.4

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2571

HOUSING: Aluminium + PC

BEAM ANGLE: 360°

BODY COLOR: White

POWER: 10W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K

LUMENS OUTPUT: 567lm

IP RATING: IP65

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 6507

HOUSING: Aluminium Die Casting

BEAM ANGLE: 115°

BODY COLOR: Dark Grey

POWER: 12W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 696lm

IP RATING: IP54

POWER FACTOR: >0.80

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 930

HOUSING: Aluminium Die Casting

BEAM ANGLE: 120°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Epistar

COLOR TEMP: 3000K


LUMENS OUTPUT: 675lm

IP RATING: IP65

POWER FACTOR: >0.80

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1741

HOUSING: Aluminium + Glass

BEAM ANGLE: 26°

BODY COLOR: Dark Grey

POWER: 3X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 692lm

IP RATING: IP54

POWER FACTOR: >0.7

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 3705R

HOUSING: Aluminium Die Casting

BEAM ANGLE: 180°

BODY COLOR: Black

POWER: 5W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54

POWER FACTOR: >0.60

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz


DRIVER: Range-Lite



RL 3001

HOUSING: Aluminium Die Casting
BEAM ANGLE: 40°
BODY COLOR: Grey


POWER: 5W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP54
POWER FACTOR: >0.70
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 3001

HOUSING: Aluminium Die Casting
BEAM ANGLE: 40°
BODY COLOR: Grey


POWER: 2X5W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP54
POWER FACTOR: >0.70
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 3002

HOUSING: Aluminium Die Casting
BEAM ANGLE: 38°
BODY COLOR: Black


POWER: 12W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP54
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 3002

HOUSING: Aluminium Die Casting
BEAM ANGLE: 38°
BODY COLOR: Black


POWER: 2X12W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 100-110lm/w
IP RATING: IP54
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1282

HOUSING: Aluminium Die Casting
BEAM ANGLE: 36°
BODY COLOR: Dark Grey


POWER: 1X5W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP54
POWER FACTOR: >0.50
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1283

HOUSING: Aluminium Die Casting
BEAM ANGLE: 36°
BODY COLOR: Dark Grey

POWER: 2X5W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 80-85lm/w
IP RATING: IP54
POWER FACTOR: >0.50
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1284

HOUSING: Aluminium Die Casting

BEAM ANGLE: 38°

BODY COLOR: Dark Grey

POWER: 50W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 80-90lm/w

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1285

HOUSING: Aluminium Die Casting

BEAM ANGLE: 38°

BODY COLOR: Dark Grey

POWER: 2X50W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 80-90lm/w

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2503

HOUSING: Aluminium Die Casting

BEAM ANGLE: 86°

BODY COLOR: Dark Grey

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-75lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2506

HOUSING: Aluminium Die Casting

BEAM ANGLE: 86°

BODY COLOR: Dark Grey

POWER: 2X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-75lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 303

HOUSING: Aluminium Die Casting

BEAM ANGLE: 90°

BODY COLOR: Black

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K


LUMENS OUTPUT: 85-90lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 304

HOUSING: Aluminium Die Casting

BEAM ANGLE: 90°

BODY COLOR: Black

POWER: 2X3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K



LUMENS OUTPUT: 85-90lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz


DRIVER: Range-Lite

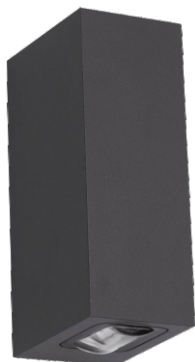

RL 279

HOUSING: Aluminium Die Casting
BEAM ANGLE: 6°
BODY COLOR: Black


POWER: 2X3W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 70-75lm/w
IP RATING: IP54
POWER FACTOR: >0.50
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1281B

HOUSING: Aluminium + Glass
BEAM ANGLE: 85°
BODY COLOR: Dark Grey



POWER: 1X3W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 121lm
IP RATING: IP54
POWER FACTOR: >0.4
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2512

HOUSING: Aluminium Die Casting
BEAM ANGLE: 46°
BODY COLOR: Dark Grey

POWER: 12W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 70-75lm/w
IP RATING: IP54
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

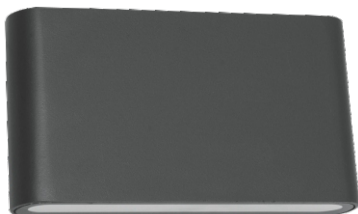

RL 802

HOUSING: Aluminium Die Casting

BEAM ANGLE: 120°

BODY COLOR: Dark Grey

POWER: 2X8W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-75lm/w

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2012 RD

HOUSING: Aluminium Die Casting

BEAM ANGLE: 30°

BODY COLOR: Dark Grey

POWER: 4X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 60-65lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2012 SQ

HOUSING: Aluminium Die Casting

BEAM ANGLE: 11°

BODY COLOR: Dark Grey

POWER: 4X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 60-65lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 4406

HOUSING: Aluminium Die Casting

BEAM ANGLE: 85°

BODY COLOR: Dark Grey

POWER: 2X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K

LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54

POWER FACTOR: >0.60

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 4412

HOUSING: Aluminium Die Casting

BEAM ANGLE: 85°

BODY COLOR: Dark Grey

POWER: 4X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54

POWER FACTOR: >0.60

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2912

HOUSING: Aluminium Die Casting

BEAM ANGLE: 85°

BODY COLOR: Black

POWER: 4X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2906

HOUSING: Aluminium Die Casting

BEAM ANGLE: 85°

BODY COLOR: Dark Grey

POWER: 2X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 6506

HOUSING: Aluminium Die Casting

BEAM ANGLE: 110°

BODY COLOR: Grey

POWER: 2X3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K



LUMENS OUTPUT: 80-85lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

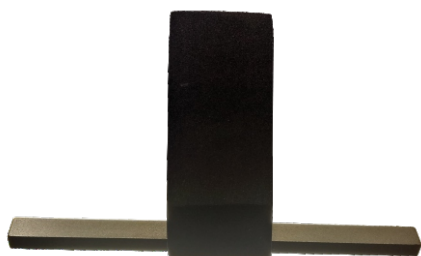

RL 3303

HOUSING: Aluminium Die Casting

BEAM ANGLE: 120°

BODY COLOR: Black

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-75lm/w

IP RATING: IP54

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 10

HOUSING: Aluminium Die Casting

BEAM ANGLE: 77°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 90-95lm/w

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 12

HOUSING: Aluminium Die Casting

BEAM ANGLE: 77°

BODY COLOR: Dark Grey

POWER: 9W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 90-95lm/w

IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 14

HOUSING: Aluminium Die Casting

BEAM ANGLE: 85°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K



LUMENS OUTPUT: 90-95lm/w

IP RATING: IP54

POWER FACTOR: >0.60

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

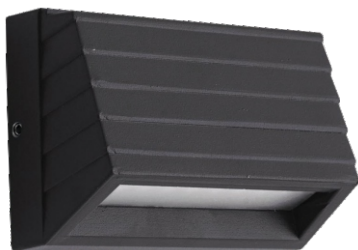

RL 2102

HOUSING: Aluminium Die Casting

BEAM ANGLE: 98°

BODY COLOR: Dark Grey

POWER: 4W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K



LUMENS OUTPUT: 75-80lm/w

IP RATING: IP54

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

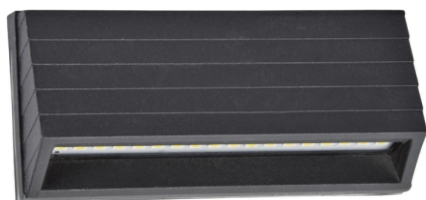

RL 2104

HOUSING: Aluminium Die Casting

BEAM ANGLE: 98°

BODY COLOR: Dark Grey

POWER: 8W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K

LUMENS OUTPUT: 75-80lm/w


IP RATING: IP54

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite





RL 3706

HOUSING: Aluminium Die Casting

BEAM ANGLE: 120°

BODY COLOR: Black

POWER: 10W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-75lm/w

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 3707

HOUSING: Aluminium Die Casting

BEAM ANGLE: 120°

BODY COLOR: Grey

POWER: 6W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 70-75lm/w

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 3708

HOUSING: Aluminium Die Casting

BEAM ANGLE: 77°

BODY COLOR: Grey

POWER: 10W

LIGHT SOURCE: Osram

COLOR TEMP: 3000K

LUMENS OUTPUT: 900lm

IP RATING: IP54



POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

A modern staircase with wide, light-colored stone steps. The wall to the right of the stairs is a dark, textured material. Several small, square, recessed footlights are embedded in the wall, casting a warm glow upwards. A metal handrail is visible on the left side of the stairs. Above the stairs, there is a balcony or walkway with a glass railing and some greenery.

RECESSED FOOT LIGHT

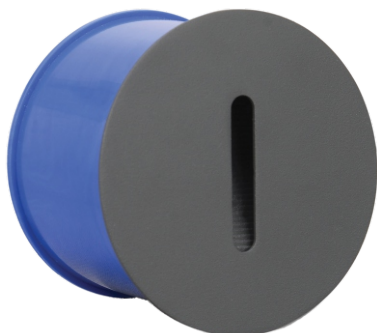

RL 224

HOUSING: Aluminium Die Casting

BEAM ANGLE: 10°

BODY COLOR: Graphite Grey

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K



LUMENS OUTPUT: 108lm

IP RATING: IP54

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 225

HOUSING: Aluminium Die Casting

BEAM ANGLE: 10°

BODY COLOR: Graphite Grey

POWER: 3W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 108lm

IP RATING: IP54

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 226

HOUSING: Aluminium Die Casting

BEAM ANGLE: 75°

BODY COLOR: Graphite Grey

POWER: 3W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 75lm

IP RATING: IP54

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 227

HOUSING: Aluminium Die Casting

BEAM ANGLE: 33°

BODY COLOR: Graphite Grey

POWER: 6W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K


LUMENS OUTPUT: 169lm

IP RATING: IP54

POWER FACTOR: >0.50

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 220

HOUSING: Aluminium Die Casting

BEAM ANGLE: 60°

BODY COLOR: Wh, Bk

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 94lm

IP RATING: IP65

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 223

HOUSING: Aluminium Die Casting

BEAM ANGLE: 60°

BODY COLOR: Wh, Bk

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K

LUMENS OUTPUT: 94lm

IP RATING: IP65


POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø43mm



RL 18070

HOUSING: Aluminium Die Casting

BEAM ANGLE: 60°

BODY COLOR: White

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K

LUMENS OUTPUT: 165lm

IP RATING: IP54


POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø69X29mm



RL 18077

HOUSING: Aluminium Die Casting

BEAM ANGLE: 15°

BODY COLOR: White

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K

LUMENS OUTPUT: 165lm

IP RATING: IP54


POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø110X110X60mm



RL 0909

HOUSING: Aluminium Die Casting

BEAM ANGLE: 29°

BODY COLOR: Dark Grey

POWER: 2W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 169lm

IP RATING: IP65

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 0909

HOUSING: Aluminium Die Casting

BEAM ANGLE: 30°

BODY COLOR: Dark Grey

POWER: 4W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 327lm

IP RATING: IP65

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 0909

HOUSING: Aluminium Die Casting

BEAM ANGLE: 30°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 529lm

IP RATING: IP65

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 034

HOUSING: Aluminium Die Casting

BEAM ANGLE: 31°

BODY COLOR: Dark Grey

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 90lm

IP RATING: IP54

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 035

HOUSING: Aluminium Die Casting

BEAM ANGLE: 110°

BODY COLOR: Wh, Bk

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K

LUMENS OUTPUT: 279lm

IP RATING: IP65


POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø72X104mm



RL 0503

HOUSING: Aluminium Die Casting

BEAM ANGLE: 70°

BODY COLOR: Dark Grey

POWER: 3W

LIGHT SOURCE: Edison

COLOR TEMP: 3000K

LUMENS OUTPUT: 169lm

IP RATING: IP65


POWER FACTOR: >0.40


INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



LED CEILING LIGHT

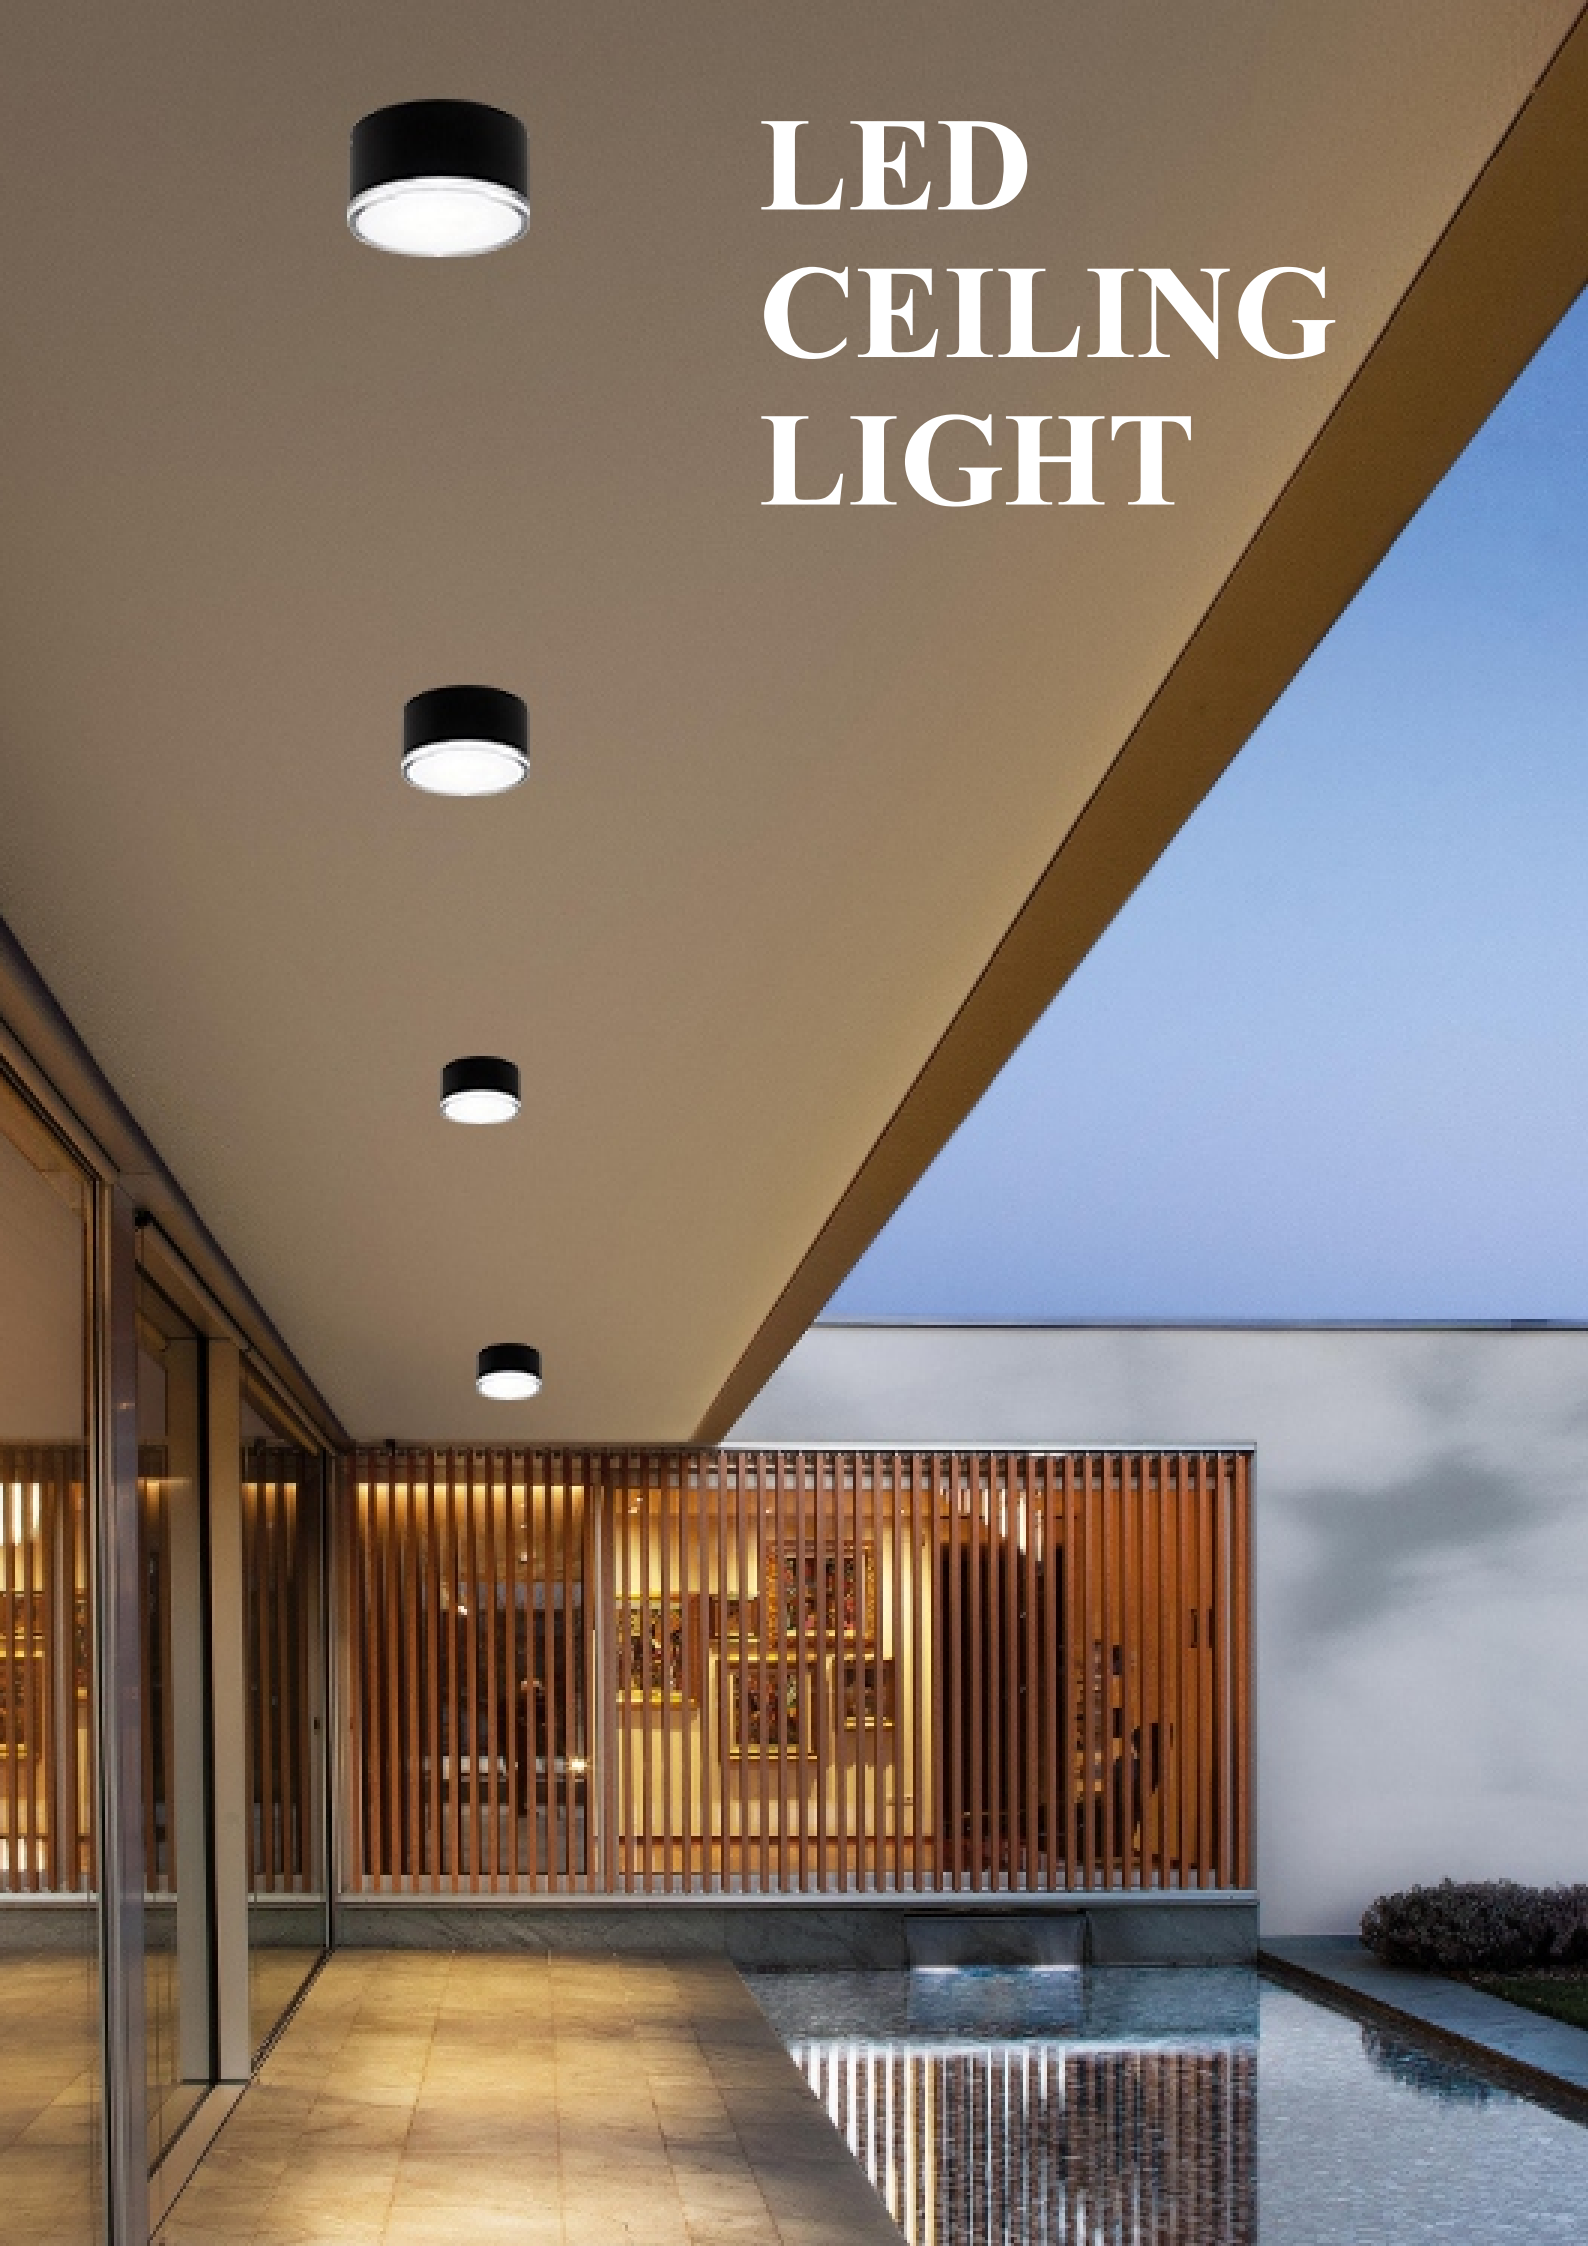




RL 2272

HOUSING: Aluminium
BEAM ANGLE: 120°
BODY COLOR: Black


POWER: 3W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 300lm
IP RATING: IP54
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz



RL 2808R / RL 2814R

HOUSING: Aluminium Die Casting
BEAM ANGLE: 180°
BODY COLOR: Wh, Bk


POWER: 8W | 14W
LIGHT SOURCE: Cree
COLOR TEMP: 3K/4K
LUMENS OUTPUT: 800lm | 1400lm
IP RATING: IP54
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 6508

HOUSING: Aluminium Die Casting
BEAM ANGLE: 17°
BODY COLOR: Grey


POWER: 9W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 630lm
IP RATING: IP54
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2508

HOUSING: Aluminium Die Casting
BODY COLOR: Grey


POWER: GU-10
IP RATING: IP54



RL 2514R

HOUSING: Aluminium Die Casting
BEAM ANGLE: 36°
BODY COLOR: Black


POWER: 14W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 976lm
IP RATING: IP65
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2521R

HOUSING: Aluminium Die Casting
BEAM ANGLE: 36°
BODY COLOR: Dark Grey

POWER: 21W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 1429lm
IP RATING: IP65
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 2522

HOUSING: Aluminium Die Casting

BEAM ANGLE: 36°

BODY COLOR: Dark Grey

POWER: 50W

LIGHT SOURCE: Cree

COLOR TEMP: 3K/4K


LUMENS OUTPUT: 95lm/w

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 2514S

HOUSING: Aluminium Die Casting

BEAM ANGLE: 36°

BODY COLOR: Dark Grey

POWER: 14W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 976lm

IP RATING: IP65

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

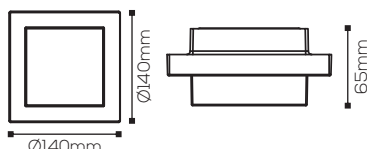

RL 1571

HOUSING: Aluminium + PC

BEAM ANGLE: 126°

BODY COLOR: Dark Grey

POWER: 4W

LIGHT SOURCE: Everlight

COLOR TEMP: 3000K


LUMENS OUTPUT: 278lm

IP RATING: IP54

POWER FACTOR: >0.3

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1320S

HOUSING: Aluminium Die Casting

BEAM ANGLE: 120°

BODY COLOR: White

POWER: 15W

LIGHT SOURCE: Epistar

COLOR TEMP: 3000K


LUMENS OUTPUT: 1200lm

IP RATING: IP54

POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 6509

HOUSING: Aluminium Die Casting

BEAM ANGLE: 17°

BODY COLOR: Black

POWER: 6W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 1190lm

IP RATING: IP54

POWER FACTOR: >0.70




INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite

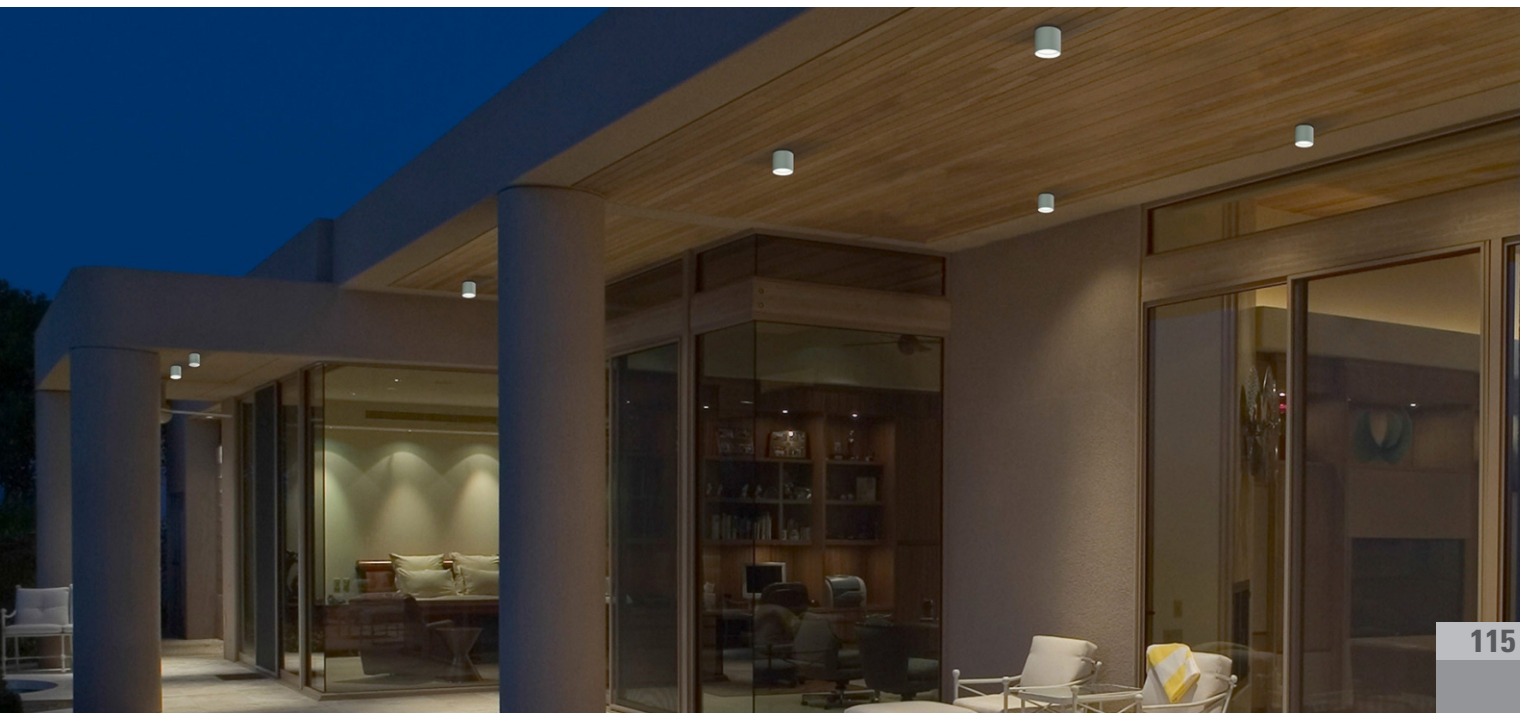

LED SPIKE & WALL LIGHT





RL 1407

HOUSING: Aluminium Die Casting

BEAM ANGLE: 36°

BODY COLOR: Dark Grey

POWER: 3W / 8W / 15W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 90-95lm/w

IP RATING: IP65

POWER FACTOR: >0.40-0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1406

HOUSING: Aluminium Die Casting

BEAM ANGLE: 36°

BODY COLOR: Dark Grey

POWER: 6W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K

LUMENS OUTPUT: 95lm/w

IP RATING: IP65

POWER FACTOR: >0.70

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 1203 / 1207 / 1212

HOUSING: Aluminium Die Casting

BEAM ANGLE: 38°

BODY COLOR: Grey

POWER: 3W | 7W | 12W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 90-95lm/w

IP RATING: IP65

POWER FACTOR: >0.40-0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz


DRIVER: Range-Lite



RL 1307

HOUSING: Aluminium Die Casting
BODY COLOR: Grey


POWER: Max 20W
LIGHT SOURCE: (GU-10)
IP RATING: IP65



RL 1951

HOUSING: Aluminium + Glass
BEAM ANGLE: 23°
BODY COLOR: Dark Grey


POWER: 7W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 433lm
IP RATING: IP65
POWER FACTOR: >0.7
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1852

HOUSING: Aluminium + Glass
BEAM ANGLE: 42°
BODY COLOR: Dark Grey


POWER: 12W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 919lm
IP RATING: IP54
POWER FACTOR: >0.7
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 0206

HOUSING: Aluminium Die Casting
BEAM ANGLE: 36°
BODY COLOR: Grey


POWER: 15W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 1200lm
IP RATING: IP65
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1208 / RL 1213

HOUSING: Aluminium Die Casting
BEAM ANGLE: 38°
BODY COLOR: Grey

POWER: 7W | 12W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 90-95lm/w
IP RATING: IP65
POWER FACTOR: >0.60-0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 1217

HOUSING: Aluminium Die Casting
BEAM ANGLE: 38°
BODY COLOR: Grey

POWER: 7W
LIGHT SOURCE: Cree
COLOR TEMP: 3000K
LUMENS OUTPUT: 90-95lm/w
IP RATING: IP65
POWER FACTOR: >0.70
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite

RL 3003-J

HOUSING: Aluminium Die Casting

BEAM ANGLE: 10°

BODY COLOR: Grey

POWER: 15W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 120lm/w

IP RATING: IP65


POWER FACTOR: >0.90

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite




INGROUND & PATH WASHER LIGHT

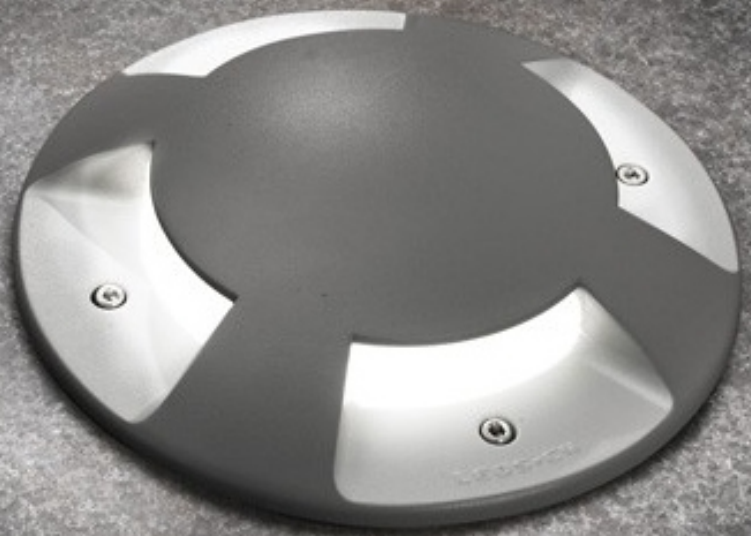



CUTOUT: Ø40mm



RL 0203

HOUSING: Aluminium + PC

BEAM ANGLE: 60°

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K

LUMENS OUTPUT: 70-75lm/w

IP RATING: IP65


POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø30mm



RL 0204

HOUSING: Aluminium + PC

BEAM ANGLE: 60°

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K

LUMENS OUTPUT: 90-95lm/w

IP RATING: IP65


POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø34mm



RL 0303

HOUSING: Aluminium + PC

BEAM ANGLE: 45°

POWER: 3W

LIGHT SOURCE: Osram

COLOR TEMP: 3000K

LUMENS OUTPUT: 90-95lm/w

IP RATING: IP65


POWER FACTOR: >0.60

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



CUTOUT: Ø30mm



RL 0205

HOUSING: Aluminium + PC

BEAM ANGLE: 60°

POWER: 3W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 90-95lm/w

IP RATING: IP65

POWER FACTOR: >0.40

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 7205

HOUSING: Aluminium Die Casting

BEAM ANGLE: 105°

BODY COLOR: Dark Grey

POWER: 1X2W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70lm

IP RATING: IP54

POWER FACTOR: >0.30

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 7206

HOUSING: Aluminium Die Casting

BEAM ANGLE: 105°

BODY COLOR: Dark Grey

POWER: 2X1W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70lm/w

IP RATING: IP54

POWER FACTOR: >0.30

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 7207

HOUSING: Aluminium Die Casting

BEAM ANGLE: 105°

BODY COLOR: Dark Grey

POWER: 3X1W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70lm/w

IP RATING: IP54

POWER FACTOR: >0.30

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 7208

HOUSING: Aluminium Die Casting

BEAM ANGLE: 105°

BODY COLOR: Dark Grey

POWER: 4X1W

LIGHT SOURCE: Cree

COLOR TEMP: 3000K


LUMENS OUTPUT: 70lm/w

IP RATING: IP54

POWER FACTOR: >0.30

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-Lite



RL 7209

HOUSING: Aluminium + PC

BEAM ANGLE: 90°

POWER: 3W

LIGHT SOURCE: Bridgelux

COLOR TEMP: 3000K


LUMENS OUTPUT: 90lm/w

IP RATING: IP65

POWER FACTOR: >0.60

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz


DRIVER: Range-Lite



RL 7210

HOUSING: Aluminium + PC
BEAM ANGLE: 90°

POWER: 3W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 90lm/w
IP RATING: IP65
POWER FACTOR: >0.60
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite




RL 7211

HOUSING: Aluminium + PC
BEAM ANGLE: 90°

POWER: 3W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K
LUMENS OUTPUT: 90lm/w
IP RATING: IP65
POWER FACTOR: >0.60
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite






RL 0306

HOUSING: Aluminium
BEAM ANGLE: 45°
BODY COLOR: SS FINISH

POWER: 6W
LIGHT SOURCE: Osram
COLOR TEMP: 3000K
LUMENS OUTPUT: 90lm/w
IP RATING: IP65
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite



RL 0312

HOUSING: Aluminium
BEAM ANGLE: 45°
BODY COLOR: SS FINISH

POWER: 12W
LIGHT SOURCE: Osram
COLOR TEMP: 3000K
LUMENS OUTPUT: 90lm/w
IP RATING: IP65
POWER FACTOR: >0.90
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-Lite




UNDER WATER LIGHT





CUTOUT: Ø75mm




RL 0315

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Recessed

POWER: 3W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.50
INPUT VOLTAGE: 12VDC



CUTOUT: Ø75mm




RL 0318

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Recessed

POWER: 6W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC



CUTOUT: Ø110mm




RL 0321

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Recessed

POWER: 9W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC




CUTOUT: Ø110mm



RL 0324

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Recessed


POWER: 12W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC



RL 0327

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface


POWER: 3W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.50
INPUT VOLTAGE: 12VDC



RL 0330

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface


POWER: 6W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC



RL 0333

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface


POWER: 9W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC



RL 0336

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface


POWER: 12W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC



RL 0339

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface


POWER: 3W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.50
INPUT VOLTAGE: 12VDC



RL 0342

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface


POWER: 6W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC



RL 0345

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface

POWER: 9W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC




RL 0348

HOUSING: Aluminium + Glass
BEAM ANGLE: 45°
BODY COLOR: SS Finish
MOUNTING: Surface

POWER: 12W
LIGHT SOURCE: Osram
COLOR TEMP: WW, GR, BL
LUMENS OUTPUT: 90lm/w
IP RATING: IP68
POWER FACTOR: >0.90
INPUT VOLTAGE: 12VDC

WALL WASHER



RL 7212

HOUSING: Aluminium + Glass

BEAM ANGLE: 15°

BODY COLOR: SS Finish

MOUNTING: Recessed

POWER: 10W

LIGHT SOURCE: Osram

COLOR TEMP: 3K, 4K




LUMENS OUTPUT: 110-120lm/w

IP RATING: IP65

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



RL 7213 / 7214 / 7215

HOUSING: Aluminium + Glass

BEAM ANGLE: 15°

BODY COLOR: SS Finish

MOUNTING: Recessed

POWER: 20W | 30W | 40W

LIGHT SOURCE: Osram

COLOR TEMP: 3K, 4K

LUMENS OUTPUT: 110-120lm/w

IP RATING: IP65

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



RL 7216

HOUSING: Aluminium + PC

BEAM ANGLE: 15°

BODY COLOR: Grey

POWER: 11W

LIGHT SOURCE: Osram

COLOR TEMP: 3000K

LUMENS OUTPUT: 110-120lm/w

IP RATING: IP65

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



RL 7216

HOUSING: Aluminium + PC

BEAM ANGLE: 15°

BODY COLOR: Grey

POWER: 22W

LIGHT SOURCE: Osram

COLOR TEMP: 3000K

LUMENS OUTPUT: 110-120lm/w

IP RATING: IP65

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



RL 7216

HOUSING: Aluminium + PC

BEAM ANGLE: 15°

BODY COLOR: Grey

POWER: 44W

LIGHT SOURCE: Osram

COLOR TEMP: 3000K


LUMENS OUTPUT: 110-120lm/w

IP RATING: IP65

POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite



RL 7233

HOUSING: Aluminium Die Casting

BEAM ANGLE: 25°

BODY COLOR: Grey

MOUNTING: Surface

POWER: 18W

LIGHT SOURCE: Osram

COLOR TEMP: 3000K

LUMENS OUTPUT: 110-120lm/w

IP RATING: IP66


POWER FACTOR: >0.95

INPUT VOLTAGE: 100-240 VAC / 50~60 Hz

DRIVER: Range-lite

FLOOD LIGHT






RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°


POWER: 30W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3000K/6000K
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°


POWER: 50W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K | RED/BLUE/GREEN
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°


POWER: 100W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K | RED/BLUE/GREEN
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°



POWER: 150W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K | RED/BLUE/GREEN
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°


POWER: 200W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K | RED/BLUE/GREEN
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite

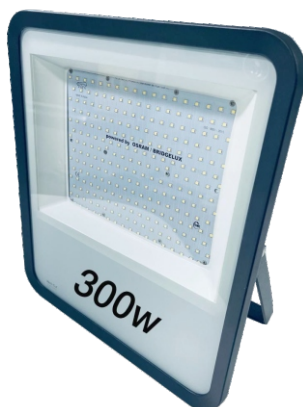

RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°


POWER: 300W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K | RED/BLUE/GREEN
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 222

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°


POWER: 400W
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K | RED/BLUE/GREEN
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 5505

HOUSING: Aluminium Die Casting
BEAM ANGLE: 120°


POWER: 50W | 100W | 150W
LIGHT SOURCE: Osram
COLOR TEMP: 6500K
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite



RL 4405

HOUSING: Aluminium Die Casting
BEAM ANGLE: 120°

POWER: 100W | 150W | 200W
LIGHT SOURCE: Osram
COLOR TEMP: 6500K
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite

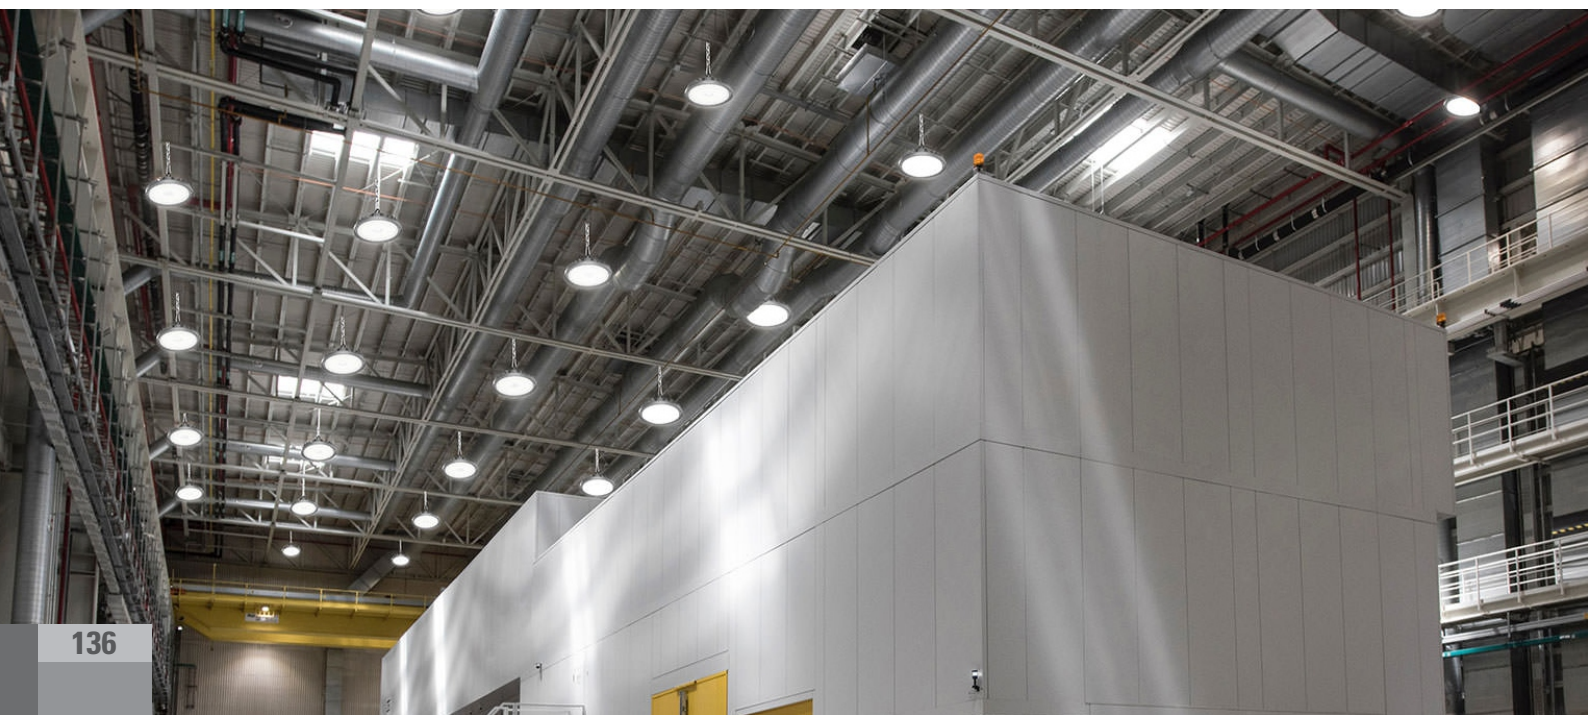

STREET LIGHT



RL 999-24W

RL 999-36W

RL 999-50W

RL 999-72W

RL 999-100W

RL 999-150W

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°
LIGHT SOURCE: Bridgelux
COLOR TEMP: 3K/6K
LUMENS OUTPUT: 110-120lm/w
IP RATING: IP65
POWER FACTOR: >0.95
INPUT VOLTAGE: 100-240 VAC / 50~60 Hz
DRIVER: Range-lite

SOLAR STREET LIGHT



RL 999

HOUSING: Aluminium Die Casting
BEAM ANGLE: 110°

POWER: 50W
LIGHT SOURCE: Epistar
COLOR TEMP: 6500K
LUMENS OUTPUT: 4750lm
IP RATING: IP65



[illegible]



R **RANGE-LITE**[®]
Original

Email: sales@rangelite.in
shreevinayakelectricals@gmail.com

Website: www.rangelite.in

  [rangeliteindia](#)



Scan this QR-Code
for more details